

Rec'd PTO

27 MAY 2004



10/536821

PCT/GB 2003/005080



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road

Newport  
South Wales  
NP10 8QQPO

REC'D 06 JAN 2004

PCT

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company." may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


23 December 2003

**BEST AVAILABLE COPY**

THIS PAGE BLANK

THIS PAGE BLANK (USPTO)

Patents Form 1/77  
Patents Act 1977  
(Rule 16)

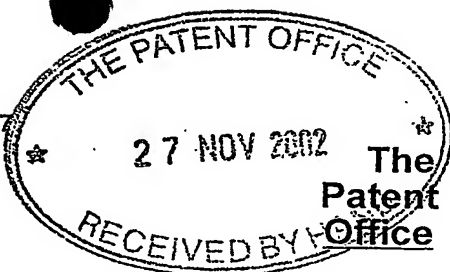

28NOV02 E766783-3 D02917  
P01/7700 0.00-0227673.1

## Request for grant of a patent

The Patent Office  
Cardiff Road  
Newport  
South Wales NP10 8QQ

1. Your reference 3023001/JAC
2. Patent Application Number 27 NOV 2002 0227673.1
3. Full name, address and postcode of the or of each applicant (*underline all surnames*)  
Taylor Hobson Limited  
2 New Star Road  
Leicester  
LE4 9JQ  
Patents ADP number (*if known*)  
If the applicant is a corporate body, give the country/state of its incorporation Country: United Kingdom  
7147515001
4. Title of the invention A SURFACE PROFILING APPARATUS
5. Name of agent Beresford & Co  
"Address for Service" in the United Kingdom to which all correspondence should be sent 16 High Holborn  
LONDON  
WC1V 6BX  
Patents ADP number [ADP - 00001826001]
6. Priority details  
Country Priority application number Date of filing

# Patents Form 1/77

7. If this application is divided or otherwise derived from an earlier UK application give details

Number of earlier application

Date of filing

8. Is a statement of inventorship and or right to grant of a patent required in support of this request?

YES

9. Enter the number of sheets for any of the following items you are filing with this form.

Continuation sheets of this form

Description 58

Claim(s) 38

Abstract 1

Drawing(s) 20 + 20 ✓ *me*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents form 7/77*) 1 + 3 copies —

Request for preliminary examination and search (*Patents Form 9/77*) 1 — *JP*

Request for Substantive Examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application

Signature

*Beresford*

Date 27 November 2002

BERESFORD & Co

12. Name and daytime telephone number of person to contact in the United Kingdom

JANE CLARK

Tel: 020 7831 2290



DUPLICATE

# A SURFACE PROFILING APPARATUS

This invention relates to a surface profiling apparatus,  
in particular surface profiling apparatus for determining  
5 surface profile data using interferometric techniques.

As discussed in a paper entitled "Profilometry with a  
Coherence Scanning Microscope" by Byron S. Lee and  
Timothy C Strand published in Applied Optics Volume 29,  
10 No. 26 10 September 1990 at pages 3784 to 3788, as  
manufacturing tolerances have reduced, demands have  
increased on optical metrology techniques for improved  
lateral and vertical resolution. Conventional  
monochromatic interferometric surface profiling apparatus  
15 offers good vertical resolution in the nanometre to  
Angstrom range but phase ambiguity limits the measurement  
range to phase shifts of less than  $2\pi$ . Various techniques  
have been proposed to extend this measurement range  
including, for example, phase unwrapping, heterodyne  
20 interferometry and multi-wavelength interferometry.  
However, phase unwrapping generally requires a smooth  
continuous measurement surface if phase ambiguity errors  
are not to arise. Heterodyne interferometry involves  
mixing beams at two separate frequencies and uses the  
25 resultant beat frequency for interferometry measurements.  
Heterodyne interferometry has an unambiguous range based  
on the wavelength of the beat frequency and this range  
is therefore limited by the limit on how close the two  
frequencies used can be. Multi-wavelength interferometry

produces at least two different interferometric profiles using different wavelengths and again the unambiguous range is determined by the wavelength of the difference in frequency between the at least two wavelengths used.

5

As discussed in the paper by Lee and Strand, these problems can be addressed by the use of coherence scanning or broadband scanning interferometry which can provide practical measurement ranges easily exceeding  
10 hundreds of micrometres.

15

Coherence scanning or broadband scanning interferometry uses a standard interferometer such as a Michelson interferometer with a broadband spatially incoherent  
15 light source such as a quartz halogen lamp. Generally, but not necessarily, the broadband source will be a white light source. One of the sample surface whose profile is to be determined and the reference mirror of the interferometer is moved relative to the other along a  
20 scan path to change the relative path length and a two dimensional image sensor such as a CCD camera is used to sense the resulting interference pattern which changes as the sample surface and reference mirror are moved relative to one another.

25

Each sensing element or pixel of the image sensor senses the portion of the interference pattern for a corresponding region or surface pixel of the sample surface and, as the sample surface and the reference

mirror are moved relative to one another, the amount or intensity of light received by the sensing element will vary in accordance with the change in the interference fringes. The intensity of light received from a region of the sample surface will increase or decrease in amplitude in dependence upon the path length difference between the light paths from the reference mirror and the sensing surface and will have a coherence peak or extremum (maximum or minimum amplitude) at the position of zero path difference. Where different regions of the surface have different relative heights, then those different regions will have coherence peaks at different positions along the scan path. Accordingly, the relative positions of the coherence peaks can be used to provide surface profile data, that is data representing the relative height of the different regions of the sample surface.

It is important to ensure that the coherence peaks for each different surface region fall on the scan path. Although this could be ensured by having a relatively long scan path this would, for most surfaces, result in acquisition of an unnecessarily large number of frames of data which would then have to be stored and processed. It is therefore desirable for the coherence scanning or broadband scanning surface profiling apparatus to be set up to use the minimum scan path required to acquire data to determine the coherence peaks for each different region of the surface being measured.

In one aspect, the present invention provides a broadband or coherence scanning interferometer having a user interface that facilitates determination of an appropriate scan path range or length.

5

In one aspect, the present invention provides a broadband or coherence scanning interferometer that includes image enhancing means for enhancing acquired image data to assist a user in locating an interference fringe region.

10

In one aspect, the present invention provides a broadband or coherence scanning interferometer having gradient enhancing means for enhancing gradient in image data for display to a user or operator to make interference fringes more easily visible to a user.

15

In one aspect, the present invention provides a broadband or coherence scanning interferometer having intensity difference data determining means for determining intensity difference data representing an intensity difference between a current image and a reference image and modifying means for modifying image data for display to a user or operator in accordance with the intensity difference data to make interference fringes more easily

20

25 ~~visible to a user.~~

In one aspect, the present invention provides a broadband or coherence scanning interferometer having gradient data determining means for determining gradient data from an

image, intensity difference data determining means for determining intensity difference data representing an intensity difference between a current image and a reference image and modifying means for modifying image data for display to a user or operator in accordance with the gradient data and intensity difference data to make interference fringes more easily visible to a user.

In one aspect, the present invention provides a broadband or coherence scanning interferometer having light source adjusting means for enabling a user to focus a broadband or coherence scanning interferometer apparatus more easily.

In one aspect, the present invention provides a broadband or coherence scanning interferometer having filter means for restricting the wavelength of a broadband light source to increase the scanning path range over which interference fringes can be detected so as to facilitate focussing by a user of the broadband or coherence scanning interferometer on an interference fringe region.

In one aspect, the present invention provides a broadband or coherence scanning interferometer having display means arranged to cause display pixels representing certain light intensity values to be easily visually distinguished, for example by being displayed in a different colour from the rest or a majority of the rest

of the intensity values to assist a user in setting up the broadband or coherence scanning interferometer.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows a schematic block diagram of a surface profiling apparatus using a coherence scanning or broadband scanning interferometer;

Figure 2 shows a graph of intensity against position  $Z$  to illustrate the interference fringes for a sample surface region around an interference fringe region or coherence peak;

Figure 3 shows a functional block diagram of surface profiling apparatus;

Figure 4 shows a simplified side-elevational, part sectional view of the surface profiling apparatus shown in Figure 3 but excluding the control apparatus;

Figure 5 shows a functional block diagram of computing apparatus that may be configured to provide the control apparatus shown in Figure 3;

Figure 6 shows a diagram for illustrating one example of an interferometer that may be used in the surface profiling apparatus;

Figure 7a shows a diagrammatic perspective view of a broadband source suitable for use in the interferometer system of Figure 1;

Figure 7b shows a diagrammatic perspective view of the broadband source shown in Figure 7a with a portion shown exploded apart to illustrate its component parts;

5 Figure 8 shows a diagrammatic representation of a display screen displayed to a user by a display of a user interface of the surface profiling apparatus in a set up mode;

10 Figure 9 shows a flow chart for illustrating steps carried out by the control apparatus to provide a gradient enhanced image;

Figure 10 shows a flow chart for illustrating steps carried out by the control apparatus to provide a contrast enhanced image;

15 Figure 11 shows a flow chart illustrating steps carried out by the control apparatus to provide a gradient and contrast enhanced image;

20 Figures 12a, b, c and d show grey scale representations of an image of a non-fringe region obtained using, respectively, no enhancement, gradient enhancement, contrast enhancement, and both contrast and gradient enhancement;

25 Figures 13a, b, c and d show grey scale representations of an image of an interference fringe region obtained using, respectively, no enhancement, gradient enhancement, contrast enhancement and both gradient and contrast enhancement;

Figure 14 shows a flow chart illustrating steps carried out by the control apparatus when a focus filter option is selected;

Figures 15 and 16 show grey scale representations of images acquired using a neutral density filter and a focus filter, respectively;

5 Figure 17 shows a flow chart illustrating steps carried out by the control apparatus to provide a colour adjusted image to facilitate determination by a user of an appropriate light intensity level;

10 Figure 18 shows a flow chart illustrating in greater detail a step of selecting R, G and B values of Figure 17;

Figure 19 shows a graph for illustrating the effect of the step of selecting R, G and B values shown in Figure 18;

15 Figures 20a to 20g and Figures 21a to 21g show representations for illustrating the appearance of a display pixel of a displayed image as the corresponding light intensity value increases from a to g with Figure 21 showing the effect of selecting R, G and B manner shown in Figure 18; and

20 Figure 22 shows a grey scale representation of an image having an interference fringe region where some of the light intensity values have reached saturation.

25 Referring now the drawings, the basic principles of surface profile or topography determination using broadband scanning or coherent scanning interferometry techniques will first be described with reference to Figures 1 and 2.



Figure 1 shows a simplified schematic block diagram of a surface profiling apparatus 1 which has a broadband or coherence scanning interferometer system 2 and data processing and control apparatus 3.

5

The broadband scanning interferometer system 2 is based on a conventional interferometer but, as discussed in the introduction, instead of having a monochromatic spatially coherent light source, the broadband scanning interferometer system 2 has a broadband source 4 which may be, for example, a white light source such as a quartz halogen lamp coupled to a regulated DC power supply having a light intensity output user control 400 provided in the form of a user-rotatable knob.

15

The broadband source 4 provides broadband light L which is split by a beam splitter (illustrated in Figure 1 as a single beam splitting prism) 5 into a first light beam which is directed along a reference path RP towards a reference mirror 6 and a second light beam which is directed along a sample path SP towards a surface 7 of a sample 8 mounted on a sample support stage 9. Light reflected from the reference mirror 6 returns along the reference path RP to the beam splitter 5 where it interferes with light reflected from the sample surface 7 back along the sample path SP. A focussing element 10a is provided to focus an image of the region of interference onto a detector 10.

20

25

Typically, the interferometer has, for example, a Mirau, Michelson or Linnik configuration.

5 In this embodiment, the detector 10 has, as shown very diagrammatically in Figure 1, a 2D (two-dimensional) array SA of image sensing elements SE. The array images an area of the sample surface 7 falling within the field of view of the detector 10. Each individual sensing element of the 2D sensing array of the detector 10  
10 detects the portion of the interference pattern falling within the acceptance cone of that element and resulting from a corresponding surface region or pixel of the area of the sample surface 7 so that effectively the imaged area of the surface can be considered as a 2D array of surface regions or pixels.. In this example, the detector  
15 10 is a CCD (Charge Coupled Device) digital camera, for example, a Vosskuhler GmbH:CCD 1300 CCD digital camera.

20 A motion controller 11 is provided to effect relative movement between the sample surface 7 and the reference mirror 6 so as to change the difference in the lengths of the paths travelled by light reflected from the reference mirror 6 and light reflected from the sample surface 7. As shown in Figure 1, the motion controller  
25 11 is arranged to move the reference mirror 6 along the reference path RP. This is equivalent to moving the sample surface 7 along a scan path in the Z direction shown in Figure 1.

The detector 10 is arranged to capture or sense the light intensity (ie the interference pattern) at intervals as the reference mirror 6 is moved. In this example, the detector captures or senses the light intensity at intervals corresponding to movement of the reference mirror 6 by 75nm. 2D image or frame data representing the intensity pattern for the field of view of the detector 10 is acquired by the detector 10 at each interval.

The intensity of the illumination sensed by one sensing element of the 2D sensing array (that is the portion of the interference pattern provided by light reflected from the corresponding region or surface pixel of the sample surface 7 imaged on that sensing element) varies as the path length difference changes with movement of the reference mirror 6, resulting in a series of fringes which have a coherence peak at the position along the scan path corresponding to zero path length difference. Figure 2 shows a graph of light intensity against position  $z$  to illustrate the change in intensity of the light sensed by a sensing element of the 2D sensing array of the detector 10 (and thus the interference fringe region) as the relative positions of the reference mirror 6 and sample surface 7 change. The envelope of the intensity distribution is the Fourier transform of the spectral distribution of spatial frequencies in the broadband source.

As is well known in the art of surface metrology, although the surface 7 may be nominally flat, the surface may have some surface form and surface roughness so that different regions or surface pixels of the surface have different heights. The position or point along the scan path at which the coherence peak occurs will be different for surface pixels at different heights. Accordingly, the surface profile or topography of an area of a surface imaged by the detector 10 can be determined by conducting a measurement operation during which the motion controller 11 causes effective movement along the scan path and images are captured at intervals by the detector 10, and by then analysing the results to determine the coherence peaks for each surface region or pixel imaged by the detector 10.

The data processing and control apparatus 3 has control apparatus 30 for controlling operation of the interferometer system 2, a data processor 32 for processing data received from the interferometer system 2 under the control of the control apparatus 30 and a user interface comprising a user input 31 and a user output 36 for enabling a user or operator to control operation of the control apparatus (and thus of the surface profiling apparatus) and for enabling the user or operator to be provided with a data output representing the results of processing by the data processor 32 of the data acquired during a measurement operation and also for enabling messages such as error

messages to be communicated to the user. In the example shown in Figure 1, the user input 31 comprises a keyboard 31a and a pointing device 31b such as a mouse while the user output device 36 comprises a display 36a.

5

The data processor 32 is arranged to process data provided by the detector 10 to determine the surface profile or surface typography of a surface imaged by the detector 10 by determining, for each surface pixel in the surface area imaged by the detector 10, the position along the scan path at which the coherence peak or a position having a predetermined relationship to the coherence peak (for example a position half way down the coherence peak curve from the actual peak) occurs.

10

15

One example of a surface profiling apparatus in which the interferometer has a Mirau configuration will now be described in detail with reference to Figures 3 to 7b in which Figure 3 shows an overall functional block diagram of the surface profiling apparatus, Figure 4 shows a simplified side elevational view of the apparatus, Figure 5 shows a block diagram of computing apparatus suitable for providing the data processing and control apparatus 3, Figure 6 shows a more detailed diagram of part of the broadband scanning interferometer system 2 and Figures 7a and 7b show an example of a broadband light source suitable for use in the interferometer system 2.

20

25

Referring firstly to Figure 3, an interferometer I of the broadband scanning interferometer system 2 has a broadband source 4, typically comprising a quartz halogen lamp, which directs broadband light L via a beam splitter 12 to an objective lens assembly 13 which includes, in addition to an objective lens 14, the beam splitter 5 and the reference mirror 6. The beam splitter 5 splits the light beam provided by the beam splitter 12 into a first reference beam that is directed along the reference path RP and a second sample beam that is directed along the sample path SP from the interferometer I towards the surface 7 of the sample 8 mounted on the sample support stage 9.

The objective lens assembly 13, and thus the reference mirror 6, is movable in the Z direction by a Z direction mover 15, in this example a piezoelectric mover, under the control of servo/drive circuitry 15e of the control apparatus 30. The sample support stage 9 is movable in X and Y directions by an X mover 16 and a Y mover 17, respectively, to enable different areas of the sample surface 7 to be brought within the field of view of the detector 10.

Figure 6 shows a diagram of part of the interferometer system to illustrate in greater detail one configuration for the broadband scanning interferometer I. In this example, the broadband source 4 comprises a quartz halogen projector bulb 4a having an associated reflector

4'a. The projector bulb 4a is coupled to an intensity controller 400a for controlling the light intensity output of the projector bulb 4a in response to operation of the user control 400. The projector bulb 4a is  
5 optically coupled to an optical fibre cable 4b from which light is transmitted via an aspheric lens 4f1, a "hot mirror" 4i (that is a thin film dielectric filter designed to reflect infrared radiation back towards the light source and away from the remaining components of  
10 the interferometer), a filter assembly 4d comprising, as will be described in greater detail below with reference to Figure 7a and 7b, a set of exchangeable filters including a neutral density filter and one or more band pass filters designed to restrict the wavelength range  
15 of the light emitted by the broadband source, and a further aspheric lens 4f.

Typically the optical fibre cable 4b will be several feet long, in this case about 4 feet (about 1200 mm), allowing  
20 the projector bulb 4a to be placed in a separate housing 4' to facilitate changing of the bulb when necessary and more importantly keeping the heat source provided by the bulb 4a away from the remainder of the interferometer.

25 The light beam L emerging from the optical fibre cable 4b is supplied via a diffuser 4c and a further aspheric lens 4h to the beam splitter 12 which, in this case, consists of a beam splitting prism 12b.

Aspheric lenses 4f1, 4f2 and 4h are used to improve the field of view. However, if this is not a concern, the lenses need not be aspheric.

5     The beam splitting prism 12b reflects light towards the objective lens assembly 13. Light returned to the beam splitting prism 12b is directed through the beam splitting prism 12b towards the detector 10 and focussed onto the detector 10 by the lens 10a.

10     The objective lens assembly 13 is mounted on an objective support 38 coupled by parallel ligaments 39 and 40 to a Z mover housing 15' mounted to the interferometer housing 2a. In this case, the Z mover comprises a piezoelectric element (PIEZO) 15b coupled via a linkage 15c and a support 15d to one of the parallel ligaments 39 so that, when a voltage is applied to the piezoelectric element by the servo/drive circuitry 15e, the piezoelectric element changes shape causing the ligament 15c and support 15d to push the ligament 39 up or down causing the objective lens assembly 13 (and thus the reference mirror 6) to move along the scan path with the degree of movement being determined by the voltage applied to the piezoelectric element 15b.

25     As shown schematically in Figures 3, 4 and 6, the majority I' of the components of the interferometer I of the broadband scanning interferometer system 2 (apart from components of the light source prior to and



including the optical fibre cable 4b) are mounted within a housing 2a mounted via a carriage 18 to a Z axis datum column 19. The fact that the components of the light source prior to and including the optical fibre cable 4b are outside the housing 2a is illustrated in Figure 3 by showing the broadband source projecting from the housing 2a. The carriage 18 is coupled via a drive mechanism (not shown) such as a ball screw or lead screw drive mechanism to a coarse Z positioner 20 in the form of a manually operable control or, in this example, a DC motor that enables the carriage 18 and thus the interferometer I to be moved up and down the column 19 in the Z direction to enable the interferometer to be moved to different scanning start positions.

The components of the broadband source subsequent to the optical fibre cable 4b (that is, in this case, the diffuser 4c and lens 4h) are provided within the housing 2a mounted via the carriage 18 to the z-axis datum column 19. The optical fibre cable 4b allows the remainder of the components of the broadband source to be provided in a separate light source assembly 4' which, as shown in Figure 4, can be mounted on a work surface WS adjacent to the remainder of the apparatus so that the heat generating light bulb 4a is remote from the interferometer.

As shown in Figure 4, a support 102 houses the X and Y movers 16 and 17 and supports the sample support stage 9.

The X and Y movers 16 and 17 comprise in this example DC motors coupled to the sample support stage 9 by appropriate conventional drive mechanisms such as rack and pinion or ball screw drive mechanisms (not shown).

5

As shown in Figures 3 and 4, each of the Z, X and Y movers is associated with a corresponding position sensor 15a, 16a and 17a while the coarse Z positioner 20 may be associated with a coarse Z positioner position sensor 20a. The control apparatus 30 has a controller 21 that controls overall operation of the interferometer system 2 and communicates with the user input 31, data processor 32, user output 31 and other parts of the control apparatus 30 which, in this example, consist of the servo drive circuitry 15e and x, y and z loggers 22, 23 and 24, each of which receives the output of the corresponding position sensor 15a, 16a, and a trigger generator 60 for triggering operation of the detector 10 in response to the output of the Z position sensor 15a to capture images at the required intervals. The controller 21 also receives an output from the coarse Z positioner position sensor 20a, if provided. The controller 21 may be programmed in known manner to compensate for any error in the Z position due to the slight arcuate nature of the motion of the objective lens assembly 13.

10

15

20

25

In the case of the X or Y mover 16 or 17, where the mover is a motor, then the corresponding position sensor may be a linear grating encoder. The dashed lines between the

support stage 9 and the X and Y position sensors 16a and 17a in Figure 3 indicate that the position sensors may sense movement of the support stage 9 directly rather than by signals derived from the corresponding motor.

5 Where the Z mover 15 is a piezoelectric mover, then the position sensor 15a may be, for example, an interferometric system, such as a grating system, or an LVDT that provides signals representing movement of the objective lens assembly 13 relative to the housing 2a of  
10 the interferometer. For example, the housing of the objective lens assembly 13 may carry a diffraction grating and a fringe detection interferometric system may be mounted within the housing 2a, providing a count of the fringes to the Z logger 24 as the objective lens  
15 assembly 13 moves relative to the housing 2a. As another possibility, a capacitive sensor may be used. As a further possibility a Michelson interferometer (with a corner cube attached to the housing 13) may be used.

20 Figures 7a and 7b show diagrammatic perspective views illustrating one example of the light source assembly 4'. The light source assembly 4' has a housing 401 containing the light bulb 4a, associated reflector 4'a and drive  
25 circuitry (not shown) for controlling the light intensity of the output of the light bulb 4a in accordance with operation by the user of the light source intensity level control knob 400.

A support plate 403 is mounted to an outlet aperture of the light source housing 401. The support plate 403 has a mounting collar 403a that receives an annular coupling portion 404a of a lens mount 404 within which is mounted the aspheric lens 4f1.

The filter assembly 4d has a back plate 405 secured to a front flange 404b of the lens mount 404 by means of coupling screw 406 so that a filter window or aperture 407 of the back plate 405 is coaxial with the optical axis of the light source 4a. The hot mirror 4i is mounted in a countersunk bore (not visible in the Figures) in the back surface of the back plate 405.

A boss 408 projecting axially from a front surface 405a of the back plate 405 extends through an axial aperture 411 of a filter carrier disc or carousel 410.

The filter carrier disc 410 has a cylindrical projection 410b carrying, in this example, four filters 410a equally angularly spaced about the axial aperture 411 so that each filter 410a can be brought into registration with the filter aperture or window 407. In this example, the four filters comprise a neutral density filter, a 40 nanometre band pass filter, a 10 nanometre band pass filter and a 1 nanometre band pass filter. In this example, the filters are HeNe (Helium Neon) filters, that is the central wavelength of the pass band is 633nm (nanometres). The latter extremely narrow wavelength

range filter is provided, as will be described below, to facilitate focussing of the interferometer system 2.

5 A front plate 413 of the filter assembly carries a lens mount (not shown) for mounting the lens 4f2 on the optical axis. An annular bearing 412 is secured (for example glued) onto the cylindrical surface of the projection 410b and a cylindrical bore (not visible in Figure 7b) in the front plate. The front plate 413 of  
10 the filter assembly is secured to the back plate by screws 409 passing through the boss 408 into the front plate 413 and the annular bearing 412 allows the filter carrier disc or carousel 410 to rotate relative to the front and back plates.

15 Although not visible in Figure 7b, the back surface of the filter carrier disc 410 carries four v grooves or notches, one radially aligned with each filter. A spring biased plunger 430 held in place by a nut 431 extends  
20 through an aperture 431 in the back plate so as to be biased into engagement with a v groove or notch when aligned therewith. The filter carrier disc or carousel 410 thus has four indexed positions defined by the v grooves and spring biased plunger 430. The filter  
25 carrier disc or carousel 410 can thus be manually rotated relative to the rear and front plates of the filter assembly 4d to bring each of the filters in turn into alignment with the aperture 407.

To assist the user in rotating the filter carrier disc 410 to bring a filter into registration with the filter window or aperture 407, a peripheral ring 414 of the filter carrier disc 410 has equally angularly spaced cut away portions 416 defining therebetween land portions 417 (twelve in this example) with every third land portion 417a being radially aligned with a corresponding filter 410a and being ridged or grooved so that a user can determine by touch a land portion corresponding with a filter.

The lands 417a radially adjacent the different filters 410a may be individually distinguishable, for example, the different lands may have different numbers of ribs or grooves so that a user can differentiate between the different lands by touch and can select a particular filter without having to look at the filter assembly. As another possibility or additionally, the different lands may be visually distinguishable, that is they be of different colours.

A front face of the front plate 413 of the filter assembly carries a coupling member 419 having a coupling aperture for receiving a coupling portion 420 of the optical fibre 4b and a cooperating Allen screw 432 and aperture for holding an end 420a of the optical fibre cable coupling portion 420 securely in place. As shown in Figure 7a, the filter assembly may carry one or more indicia (a single arrow 421 is shown in Figures 7a and

7b) to enable a user to determine visually which filter is currently aligned with the filter aperture or window.

5 The light source assembly 4' described above and the filter assembly 4d in particular enable a user rapidly and easily to change from one filter to another so that, for example, the neutral density filter can be used for normal coherence or broadband scanning interferometry while the 40 nanometre and 10 nanometre band pass filters  
10 can be used for sub-Nyquist scanning and the very narrow bandwidth 1 nanometre filter can be used for focussing as will be described below without the user having to access any internal components of the interferometer system. Moreover, the peripheral surface of the filter  
15 assembly 4d enables a user rapidly to locate the required filter in front of the filter window or aperture 407 without having to look at the filter assembly so that the user can concentrate on images being displayed to him or her while adjusting the filter assembly 4d.

20 The control apparatus 30 may be implemented by programming computing apparatus, for example a personal computer. Figure 5 shows a simplified block diagram of such computing apparatus. As shown, the computing  
25 apparatus has a processor 25 associated with memory 26 (ROM and/or RAM), a mass storage device 27 such as a hard disk drive, a removable medium drive (RMD) 28 for receiving a removable medium (RM) 29 such as a floppy disk, CDROM, DVD or the like, input and output (I/O)

5 controllers 37 for interfacing with the components of the  
broadband scanning interferometer system to be controlled  
by the control apparatus (for example, the Z, X and Y  
movers 15 to 17, the coarse Z positioner 20 and the  
10 detector 10) to enable the processor 25 to control  
operation of these components, the user input 31  
consisting, in this example of the keyboard 31a and  
pointing device 31b, and the user output 36 consisting,  
in this example, of the display 36a (which may be a CRT  
or LCD display) and a printer 36b. The computing  
15 apparatus may also include a communications interface  
(COMMS INT) 199 such as a modem or network card that  
enables the computing apparatus to communicate with other  
computing apparatus over a network such as a local area  
network (LAN), wide area network (WAN), an Intranet or  
the Internet. In this example, the data receiver 33 is  
provided as a dedicated frame capture circuit board 230  
installed within the computing apparatus.

20 The processor 25 may be programmed to provide the control  
apparatus 30 shown in Figure 3 by any one or more of the  
following ways:

- 15 1. by pre-installing program instructions and any  
associated data in a non-volatile portion of the  
memory 26 or on the mass storage device 27;



2. by downloading program instructions and any associated data from a removable medium 29 received within the removable medium drive 28; and

5 3. by downloading program instructions and any associated data as a signal SG supplied from another computing apparatus via the communications interface 199.

10 The computing apparatus, when programmed by program instructions to provide the control apparatus 30, enables a measurement operation to be controlled in accordance with instructions received by a user, and the resulting frame data supplied by the detector 10 to be analysed to  
15 determine the surface profile or topography of the area of the surface imaged onto the 2D array of the detector 10.

The surface profiling apparatus is operable in a set up  
20 mode that enables a user or operator to set up operating parameters for the sample surface to be measured.

Figure 8 shows very diagrammatically a display screen 500 that the control apparatus 30 causes the display 36a to  
25 display to the user in the set up mode to enable the user to set up the surface profiling apparatus.

As shown in Figure 8, the display screen 500 has a Windows style appearance with a minimise button 500a, a

close button 500c, a title bar 500d and optionally a maximise button 500b,.

5 The working area of the display screen 500 has a first tabbed window 501 having a tab title bar "image" 502 and a second tabbed window 503 having a tab title bar "fringe set.up" 504.

10 The window 501 is configured to display an image or frame acquired by the 2D image sensor detector 10 while the window 503 is configured to provide a user with a number of tools or operational functions to aid the user in setting up of the scan path for a measurement operation.

15 The window 503 has a first border 505 labelled "focussing image" bounding user selectable functions relating to focussing of an image, a second border 506 labelled "piezo height" encompassing a user selectable option for selecting a height for the piezoelectric Z mover, a third  
20 border 507 labelled "scanning" encompassing user selectable scanning parameters and a fourth border 508 labelled "piezo" encompassing a piezo range scale 510, a pointer or slider bar 509 for indicating the current position of the Z mover 15, and a measurement range bar  
25 511 indicating the range of z movement set for a measurement operation, the measurement range bar 511 being associated with scan end markers 511a and 511b for indicating the ends of the measurement path. The slider

bar or pointer 509 is movable by a user to enable the user to change the current location of the Z mover 15.

5 The piezo height border 506 encompasses a button 512 which, when selected by a user using the pointing device, causes the control apparatus 30 to move the Z mover 15 to the mid-point of its operational range and to move the slider bar or pointer 509 to the corresponding position on the scale 510 so that it still shows the current  
10 position of the Z mover 15, and a window 513 that displays, in micrometres ( $\mu\text{m}$ ), the current position of the Z mover 15 relative to a nominal zero position, that is the position of the Z mover corresponding to the position set by the coarse Z positioner 20. The window  
15 513 displays the actual current position of the Z mover 15 but is configured to enable a user to overwrite the current position using the keyboard to cause the control apparatus 30 to move the Z mover 15 to the new current position specified by the user as an alternative to  
20 moving the slider bar or pointer 509.

25 The scanning border 507 encompasses three buttons labelled "set as finish", "set as centre" and "set as start" 524, 523 and 522 that are configured to be used in combination with the slider bar or pointer 509 to enable a user to identify a selected position of the slider bar or pointer 509 to the control apparatus 30 as a finish, centre and start positions for a measurement operation. The scanning border 507 also encompasses

three windows 525, 526 and 527 that are arranged to display a scan time (in seconds), and scan range and scan start position (both in micrometres). As in the case of the window 513, the scan range and scan start position windows are configured so that a user can overwrite the data to cause the controller to modify the range and start position, as the case may be, in accordance with the data input by the user using the keyboard.

The slider bar or pointer 509 and measurement range bar 511 and associated end markers 511a and 511b are configured to provide the user with a clear visual representation and control over the relationship between the measurement path range represented by the measurement range bar 511, the range being represented by the measurement range bar 511 and the start and end of the measurement path of the piezoelectric Z mover being represented by the end markers 511a and 511b (the actual scan path of the Z mover 15 may include an initial run up portion and a final run down portion beyond the measurement path to enable frames of data to be acquired to enable data analysis over the entire length of the measurement path). The mid-range button 512 enables the user easily to cause the Z mover 15 to move to the middle part of its range of movement to ensure that the Z mover 15 is operating in mid-range and not at the extremes of its operational range.

The focussing image border 505 encompasses check boxes 530, 531 and 532 for enabling a user to instruct the control apparatus 30 select contrast, reference, enhancement, gradient enhancement and a focus filtering mode of operation, respectively. The focussing image border 505 also encompasses a user selectable button 533 for enabling a user to instruct the control apparatus 30 to record a reference image for use in contrast reference enhancement processing as will be described below and a save bitmap user selectable button 534 for enabling a user to save an acquired image as a bitmap for subsequent processing.

As an initial step prior to a measurement operation, the user needs to determine the approximate interference fringe region in which the coherence peaks will be found, that is the region in which interference fringes will be present in images acquired by the 2D image sensor 10, so that the scan path can be defined to encompass the interference fringe region without having an unnecessary long scan path (which would result in unnecessary expenditure of scanning time, processing and data storage capacity). The user selectable functions within the focussing image border 505 facilitate determination by the user of the coherence peak or interference fringe region as will be described below.

In operation, having positioned the surface to be measured on the support stage 9, the user selects the set

up mode which causes the surface profiling apparatus to display the set up mode screen shown in Figure 8 and to capture an image and to display the image in the window 501.

5

Usually, the interference fringe region will not be visible in the initial captured image and the user will need to adjust the height or Z position of the reference mirror 6 using the coarse positioner 20 until the interference fringe region is in focus in the image. The operator may as an initial step select the mid-range button 512 to ensure that the Z mover 15 is at its mid position so that the Z mover can be operated in its mid-range region (which should be the best operation region) during a measurement operation.

10

15

The interference fringe region can be difficult for a user to detect, particularly where a sample surface is not very reflective so that light reflected from the sample surface may be swamped by light reflected from the reference mirror. The contrast reference enhance and gradient enhance functions selectable by the user by selecting the check boxes 530 and 531, respectively, enable a user to select image processing functions that process the image data supplied by the 2D image sensor detector 10 to enhance the visibility of the fringes and so facilitate detection of the region of interference by the user.

20

25

The operation of the gradient enhancement function will now be described with the assistance of the flow chart shown in Figure 9.

5 Thus, when the user checks the gradient enhance check box 531, then for each frame of image data captured by the 2D image sensor detector 10 to be displayed in the window 501, the control apparatus 30 reads the pixel intensity values at S1 which will lie in the range to 0 to 255.

10

Then at S3, for each intensity value, the control apparatus 30 determines a gradient value representing a local light intensity gradient and modifies that pixel intensity value in accordance with that gradient value to produce a modified intensity value  $I_M$ .

15

In the present case, the control apparatus 30 determines the local intensity gradient for the surface region or pixel at coordinates  $x, y$  in the 2D array of surface regions or pixels by:

20

(1) obtaining the intensity value  $I_{-1}$  for the surface region at coordinates  $(x-1, y-1)$  and the intensity value  $I_{+1}$  for the surface regions at coordinates  $(x+1, y+1)$ ;

25

(2) determining the difference between  $I_{-1}$  and  $I_{+1}$ ;

(3) multiplying this difference by 4; and then

- (4) adding the resulting value to an adjusted intensity value ( $I/2 + 64$ ) to produce a modified pixel intensity value  $I_M$ .

5 Thus, in summary, in this case, the control apparatus 30 computes equation (1) below:

$$I_M = 64 + I/2 + (I_{-1} - I_{+1}) \times 4 \quad (1)$$

10 The intensity value  $I$  is adjusted to reduce the possibility of the resulting modified values being outside the range of pixel display values, in this case 0 to 255, available in the display mode being used. Any modified values that do lie outside this range are  
15 subsequently adjusted so that, in this example, any below zero are set to zero and any above 255 are set to 255. It will of course be appreciated that different display modes may require different adjustments (or possibly no adjustment) to the intensity value.

20 The control apparatus 30 computes equation (1) for each non-peripheral intensity value, that is each intensity value not falling on the border of the imaged area.

25 Where a surface region or pixel is at an edge of the area imaged, then it will, of course, not be possible to use intensity values for pixels on one side of the pixel of interest to determine the local gradient. In this case, the intensity value of a single pixel located diagonally



of the pixel of interest may be used. For example, where the intensity value is at x-y coordinates 0,0 in the image, where 0,0 represents the lower most left hand corner, then the local gradient may be determined using the intensity value at  $X_{+1}$ ,  $Y_{+1}$  and the intensity value of the pixel of interest with a scaling factor to account for the fact that the gradient is measured over a shorter distance, for example the difference may be multiplied by 8 rather than 4, as follows:

$$I_M = 64 + I/2 + (I - I_D) \times 8 \quad (1a)$$

where  $I_D$  is the intensity value for the pixel located diagonally of the peripheral pixel. Again, any modified values outside the required range are adjusted so that, in this example, any below zero are set to zero and any above 255 are set to 255. As another possibility, the peripheral pixels may simply be ignored.

When the control apparatus 34 has completed all of the modified intensity values  $I_M$ , then at S4 the control apparatus 30 causes the display to display the frame of image data using the modified pixel intensity values  $I_M$  in the window 501.

The control apparatus 30 is configured to carry out the processing described above with reference to Figure 9 for each acquired image during the set up procedure while the gradient enhancement check box 531 is checked.

Figure 10 shows a flow chart for illustrating the functions carried out by the control apparatus 30 when the user selects or checks the contrast reference check box S30. In order for this function to be available, a contrast reference frame has previously to be stored, otherwise the contrast reference check box 530 is greyed out. Generally, to acquire the reference frame a user moves the Z mover 15 (for example by dragging the pointer 509) so that the Z mover 15 is at the top end of its range (or the interference fringes are at least out of focus) so that the displayed image has as uniform as possible intensity. When the user then selects the record reference button 533, the control apparatus 31 acquires and stores the pixel intensity values  $I_R$  of the currently displayed frame as a reference frame at S10 in Figure 10. Once a reference frame has been acquired, then the contrast reference check box 530 becomes available and is no longer greyed out. When the user then checks the contrast reference check box 530, then, at step S11 when a subsequent frame is received from the 2D image sensor detector 10, the control apparatus reads the pixel intensity values  $I_c$  for that frame.

Then, at S13, for each pixel of the current frame, the control apparatus determines a contrast reference difference value related to the difference in the intensity value associated with that pixel in the reference frame (the reference intensity value) and the intensity value associated with that pixel in the current

frame (the current intensity value) and then modifies the current intensity value using the determined contrast reference difference value to produce a modified intensity value  $I_M$ .

5

The control apparatus repeats these steps for each intensity value of the current image.

10

Then at S14, the control apparatus 30 causes the display to display image data representing the modified intensity values in the window 501.

15

In this example, the control apparatus 30 determines as the contrast reference difference value for a pixel a value which is four times the difference between the current and reference intensity values for that pixel and adds that contrast reference value to the re-ranged intensity value. Thus, in summary, at S13 in this case, the control apparatus 30 determines a modified intensity value  $I_M$  for the pixel in accordance with equation 2 below:

20

$$I_M = 64 + I/2 + (I - I_R) \times 4 \quad (2)$$

25

Figure 11 shows a flow chart illustrating steps carried out by the control apparatus 30 if the user selects or checks both the contrast reference enhancement check box 530 and the gradient enhancement check box 531. Thus, in this case, the control apparatus again carries out S10

and S11 as described above with reference to Figure 10. Then, however, at S20, for each pixel, the control apparatus determines the gradient value representing the local intensity gradient in addition to the contrast reference difference value and then modifies the current intensity value to produce the modified intensity value using both the gradient value and the contrast reference difference values. In this example, the gradient value and contrast reference difference value are obtained as described above and the current intensity value is modified by adding both the gradient value and the contrast reference difference value to the adjusted intensity value in accordance with equation 3 below:

$$I_M = 64 + I/2 + (I_{-1} - I_{+1}) \times 4 + (I - I_R) \times 4 \quad (3)$$

In this example, the light intensity values are represented by display pixels with different degrees of saturation (with the saturation decreasing with light intensity value or apparent lightness increasing with light intensity value) such that the display pixels range from a deep colour to a light colour or white. In this example the display pixels vary from deep blue to blue-white which is achieved by setting the R, G and B values for the display pixels to  $R=I$ ,  $G=I$  and  $B=127 + I/2$ .

Figures 12a to 12d show grey scale representations of the images obtained of an area of a surface having a grid-like topography and displayed in the window 501 when no

fringes are present, that is the interferometer is not focussed on the interference fringe region. Figure 12a shows the image obtained when neither the contrast reference enhancement check box 530 nor the gradient enhancement check box 531 is selected; Figure 12b shows the image obtained when the gradient enhancement check box 531 is selected and the control apparatus 30 carries out gradient enhancement processing as described above with reference to Figure 9; Figure 12c shows the image obtained when the contrast reference enhancement check box 530 is selected and the control apparatus carries out contrast reference enhancement processing as described with reference to Figure 10; and Figure 12d shows the image obtained when both the contrast reference enhancement and gradient enhancement check boxes 530 and 531 are selected and the control apparatus carries out both enhancement processes as described with reference to Figure 11.

As can be seen by comparing Figures 12a to 12d, the image of Figure 12a, that is the image without any enhancement processing, has ill-defined or fuzzy edges to the grid-like structure and also has a very low contrast level. In contrast, the image of Figure 12b, that is the image with gradient enhancement processing, clearly defines the edges of the grid-like structure. The image of Figure 12c shows much improved contrast compared to the contrast of the images shown in Figures 12a and 12b but, compared to the image shown in Figure 12b, less distinct edges to the

5 grid-like structure while the image shown in Figure 12d,  
that is the image resulting from both gradient and  
contrast reference enhancement processing, shows both  
good contrast and well defined edges to the grid-like  
structure. Thus gradient and contrast enhancement  
processing separately enable surface features or  
structure in an image to be more easily identified by a  
user or operator and a combination of gradient  
enhancement and contrast reference enhancement processing  
10 makes such features or structures even more readily  
discernable.

15 Figures 13a to 13d show grey scale representations of the  
images obtained of the same surface area as shown in  
Figures 12a to 12d after the user has adjusted the Z  
position using the coarse Z adjuster 20 to bring the  
interference fringe region into focus.

20 In Figure 13a, that is the image for which no enhancement  
processing has been carried out, the fringes are very  
indistinct and may easily be missed by a user when  
adjusting the Z position using the coarse Z positioner  
20. In contrast, in the image shown in Figure 13b where  
the intensity value data has been subjected to gradation  
enhancement processing, visual evidence of diagonally  
25 extending fringes is more clearly evident but the  
contrast between the light and dark fringes is still low.  
In the image shown in Figure 13c where the intensity  
value data has been subject to contrast reference

enhancement, although edges in the image are still fuzzy, light and dark fringes can easily be seen. In the image shown in Figure 13d for which the intensity value data has been subject to both gradation enhancement and contrast reference enhancement processing, the image is both sharp and of good contrast enabling the fringes to be seen very easily.

Dependent upon the reflectance characteristics of the particular surface being measured, then gradation enhancement or contrast reference enhancement alone may be sufficient to make the fringes clearly visible to a user. Particularly where the measurement surface is of very low reflectance such as a glass surface, contrast reference enhancement is particularly useful because it enables fringes that would otherwise be very difficult to see with the human eye to be visible to the user or operator. The techniques described above with reference to Figures 9 to 11 and illustrated by the images shown in Figures 12a to 12d and 13a to 13d thus visually enhance surface features and interference fringes to enable a user or operator of the surface profiling apparatus to identify more easily and quickly the interference fringe region for a sample surface.

The images acquired by the 2D sensor detector 10 and displayed in the display window 501 are produced with the neutral density filter selected, that using a broadband light source. The use of a broadband light source

ensures a short coherence distance so that the interference fringe region occurs over only a short distance enabling an accurate determination of the position of the coherence peak. However, because the fringes occur over only a very short distance in the Z direction (typically 1.5 micrometres for the neutral density filter), an operator may find it difficult to locate the interference fringe region during the initial set up procedure and may move the Z position past or through the interference fringe region without noticing when adjusting the Z position using the coarse Z positioner. The user can, however, simply by manually rotating the filter assembly wheel bring the focussing filter into alignment with the filter window or aperture 407 to restrict the wavelength range of the light source so that the interference region extends over a greater distance in the Z direction to give the user a greater chance of detecting the interference fringe region.

When electing to use the focussing filter to aid identification of the interference fringe region, the user can also further enhance the image obtained by checking the focus filter check box 532 shown in Figure 8. Figure 14 shows steps carried out by the control apparatus 30 when the focus filter check box 532 is selected. Thus, when at S30 the control apparatus 30 determines that the focus filter is selected, then at S31 the control apparatus processes the intensity value data received from the 2D image sensor detector 10 to increase



the grey scale levels so that a lower intensity value is represented by a lighter coloured display pixel in the display window to compensate for the attenuation of the focussing filter. The control apparatus 31 may, if the 2D image sensor detector 10 allows, also raise the light sensitivity of the detector to increase the amount of light detected so as again to compensate for the attenuation of the focussing filter. In addition, the control apparatus may control the exposure time of the 2D image sensor detector 10 to make the interference fringe region more detectable at speed when a user is trying to find the location of the fringes by rapidly adjusting the Z position using the coarse Z position mover 20.

Figures 15 and 16 show grey scale representations of the images displayed in the display window 501 of Figure 8 when the neutral density and focussing filter, respectively, are used. As can be seen from Figure 15 when the neutral density filter is used, because the interference fringe region extends over a relatively short distance in the Z direction, only a small proportion of the fringes are sharply in focus in the image. In contrast, in the image shown in Figure 16 acquired using the focussing filter, because the interference fringe region extends over a greater distance in the Z direction, the fringes extend over a greater area in the image and are more easily detectable by the user.

The focussing filter (alone or with the enhancement processing provided by the control apparatus 30 as discussed above), thus enables a user quickly to identify at least roughly the Z position of the interference fringe region. Once this has been identified, then the user may, if desired, refine the Z position by simply rotating the filter carrier disc 410 to return to the neutral density filter and then possibly selecting one or the other or both of the gradation enhancement and contrast enhancement processing options to focus more precisely on the interference fringe region.

As described above, the control apparatus 30 is arranged to cause the images displayed in the display window 501 to be displayed with the colour lightening or becoming less saturated with increasing light intensity value. In the above example, the colour varies from deep blue to blue-white with the colour displayed getting lighter as the intensity value increases. As described above, the user may manually adjust the light intensity level (that is the output of the broadband light source) for a particular sample so that the intensity values provided by the 2D image sensor detector lie within a desired range. In order to assist the user in determining the appropriate illumination level, the control apparatus 30 may be configured to modify the colours representing the intensity values so that the certain intensity values are in a different colour and so appear visually

distinct, to assist the user in adjusting the light intensity.

5        Figures 17 and 18 show flowcharts for illustrating steps carried out by the control apparatus 30 for causing the display pixels corresponding to certain intensity values to appear visually distinct. Thus, at S40 in Figure 17, the control apparatus 30 reads a first intensity value of a frame of image data supplied by the 2D image sensor  
10        detector 10 and at S41 selects R, G and B values in accordance with the read intensity value so that a colour change is provided if the read intensity value lies in a certain range of intensity values and then at S42 checks whether there are further intensity values in the  
15        frame to be read and, if so, repeats S40 and S41 until all intensity values have been read and processed. Then, at S43, the control apparatus causes the display to display in the window 501 an image in which each intensity value is represented by the combination of R, G and B values selected at S41.  
20

25        Figure 18 shows a flow chart illustrating in greater detail one way in which the R, G and B values may be selected. Thus, at S50, the control apparatus 30 checks whether the intensity value is zero and, if so, at S51 sets the R value to maximum and the G and B values to zero so that, when the resulting bitmap image is displayed on the display, the corresponding display pixel is red. If, however, the answer at S50 is no, then at

S52, the control apparatus 30 checks whether the intensity value is equal to 255, that is the intensity value is saturated and, if so, at S53 sets R and G to maximum and B to zero so that the display pixel is yellow.

If the answer at S52 is no, then at S54 the control apparatus 30 checks whether the intensity value is greater than or equal to one and less than or equal to 127 and, if so, at S55 sets the R value equal to the received intensity value ( $R=I$ ), the B value equal to 96 plus one half of the intensity value ( $B=96 + I/2$ ) and the G value equal to five times one quarter of the intensity value ( $G=5 \times I/4$ ).

If, however, the answer at S54 is no, then at S56 the control apparatus again sets the R and B values to I and 96 plus one half of I respectively, but in this case sets the G value to 64 plus three times one quarter of the intensity value ( $G=64 + 3 I/4$ ).

This processing is, as described with reference to Figure 17 above, carried out for each intensity value of the received frame so that each intensity value is allocated to a combination of R, G and B values dependent upon the actual intensity value. Figure 19 shows a graph of intensity values 1 to 249 against R, G and B values where the solid line L1 represents the red values, the dashed line L2 represents the blue values and the dotted line

L3 represents the green value to illustrate how the three components change with intensity value. As can be seen from Figure 19, at low intensity values the blue value is much higher than the red or green values so that the corresponding display pixels appear blue. The red and blue values both increase linearly with increasing intensity value with the red value increasing more sharply but starting from a lower value than the blue value so that at a certain intensity value lines L1 and L2 crossover. In contrast, the green value or component of the pixel colour increases relatively rapidly (more rapidly than both the blue and red components) for intensity values up to 127 and thereafter continues to increase but more slowly than that of the red value and more quickly than that of the blue value. This has the effect that, in the region of the crossover between the red and blue lines L1 and L2, the green value predominates and so, when the bitmap is displayed on the display, pixels having the intensity values in the region of the crossover appear grey-green with the actual grey-green colour becoming lighter with increasing intensity value. In this example, the crossover point at which the red value equals the blue value is 192. This value may, however, be adjusted if desired by altering, for example, the constant from 96 to a different value, for example a value of 64 would mean that the crossover point would occur at 128.

As the intensity values further increase, the red and green values become more and more predominate so that display pixels representing intensity values higher than the crossover region appear more and more yellow with increasing intensity value.

The fact that mid-range intensity values appear green to the human eye makes them visually distinguishable from higher or lower intensity values. This should enable a user of the apparatus to determine when he or she has adjusted the illumination to the mid-range for a particular surface to be measured without the user having to check the actual positioning or setting of the user control 400.

Figures 20a to 20g and Figures 21a to 21g show very diagrammatically grey scale representations of the display pixels obtained for the different light intensity levels to illustrate the effect on the appearance of a display pixel of an image as its intensity value increases from a to g with Figures 20a to 20g showing the change where the control apparatus does not carry out the processing described above with reference to Figures 17 and 18 and Figures 21a to 21g showing the change where the control apparatus 30 does carry out this process and with the pixels represented by Figures 20c to 20e and 21c to 21e representing intensity values in the mid-range. As can be seen from Figures 20a to 20g, without the processing described above with reference to Figures 17

and 18, the mid-range intensity values represented by Figures 20c to 20e are relatively difficult to distinguish from the other intensity values because the shading varies gradually from dark blue to light blue (or blue-white). In contrast, in Figure 21, the mid-range intensity values represented by Figures 21c to 21e can easily be distinguished from the other intensity values because they appear grey-green (represented by cross-hatching with the spacing of the cross-hatching increasing with increasing lightness in the grey-green colour) and thus stand out from the generally blue pixels representing the intensity values just outside the mid-range.

As described above with reference to Figure 18, the control apparatus 30 is arranged to cause intensity values of zero to be represented as red on the display (which may represent missing data) and intensity values of 255 or more, that is saturation values, to be represented as yellow.

If the image contains a large proportion of red pixels this alerts the user to the fact that the measurement data may not be reliable. Representing the saturated illumination level as yellow amongst the otherwise blue image enables the user to see rapidly where the intensity values have saturated so that the user can adjust the light source intensity accordingly. Figure 22 shows a grey scale representation of the images obtained an image

corresponding to that shown in Figure 13a where the intensity values have saturated for a part of the image and thus the corresponding display pixels are yellow (the yellow pixels being illustrated by shading in Figure 22).

5

These features may be used in addition to or without the processing of the intermediate intensity values, that is S52 to 55 may be omitted from Figure 18 while still providing the user with useful information because, in this case, if the image contains pixels having intensity values of zero, these will show up clearly as red pixels in the otherwise blue and white image clearly indicating to the user that there is data missing and alerting the user to the proportion of missing data.

10

15

It will, of course, be appreciated that where gradation enhancement processing is used, other algorithms than that described above may be used. For example, the intensity value for any other pixel on either side of the pixel in question may be used, for example  $x_{-1}$ ,  $y_{+1}$  and  $x_{+1}$ ,  $y_{-1}$ . In addition, the intensity value of the pixel in question may also be taken into consideration. Furthermore, the difference between the intensity values may be multiplied by a factor other than four and the intensity values for two or more pixels on either side of the pixel in question may be used.

20

25



In the examples described above where contrast reference or gradient enhancement is used, then scaling factors other than four may be used.

5       Where a reference frame is used, then this may be pre-stored or could be an average of a number of reference frames.

10       In the examples described above where the display pixels representing the intensity values are differently coloured dependent on the intensity value, then colours other than those described above may be used. For example, single colours or hues from black to white (grey scale) rather than blue to white (or white-yellow) or  
15       from red to white or green to white rather than blue to white may be used with corresponding changes to any specific colours allocated to specific illumination levels or regions, for example, to the zero and saturation intensity values and to the mid-range  
20       intensity values so that these are of a different colour or different shades or hues of the same colour. AS described above, the control apparatus is configured to cause a range of intensity values in the mid-range to be of different colour (with the different intensity values  
25       in the mid-range being represented by different shades of the same colour) because all of the intensity values will of course not be the same. This enables the user easily to identify the illumination level for which the majority or a preponderance of the intensity values lie

in the mid-range because, in this case, the overall image will be predominantly of that different colour (shades of green in the present example).

5 Also, one or more of the image enhancement techniques described above may be used without the other. For example, the focus filter may be omitted and/or one or other or both of the gradation enhancement and contrast enhancement processing may be omitted. . . .

10 Once the user or operator is satisfied that the interferometer is focussed on the fringes of the interference fringe region, then he or she can set the desired scanning parameters by dragging the pointer 509 shown in Figure 9 to the required centre, start and finish positions of the measurement path (which does not include any run up and run down which will be determined by the control apparatus) and setting each these by selecting the appropriate one of the buttons 520 to 522.

15 20 As another possibility the user can enter numerical start, height in micrometers and measurement path range or distance in micrometers in boxes 526 and 527 which will cause the pointer 509, the measurement range bar 511 and end markers shown in Figure 8 to move to the start, 25 centre and finish position determined by the data entered in boxes 526 and 527.

The operator can also, if desired, check that the Z mover is at its mid position by selecting the mid-range button

512 which will cause the control apparatus 30 to move the Z mover 15 to the mid-point of the Z mover's range and the pointer 509 to move to the corresponding position on the scale 510 if the Z mover is not at its mid position.

5 If the mid-range is outside or to one end of the scan path, the operator can then use the coarse Z positioner 20 to reposition the interferometer system and then repeat the focussing steps described above so as to select a scan path which encompasses the mid-range of the  
10 Z mover 15.

Once the operator is satisfied that the set up parameters are correct, then the operator may exit the set up screen and instruct the control apparatus 30 using the keyboard  
15 31a and/or pointing device 31b to commence a measurement operator. When a measurement operation is instructed, the control apparatus 30 causes the Z mover 15 to move the reference mirror 6 along the defined scan path (the  
20 measurement path defined by the user plus any run up and run down portions added to the start and end of the measurement path by the control apparatus) in the set up mode and the 2D image sensor detector captures at  
25 intervals along the scan path 2D images or frames which are passed to the data processor 32 which processes the intensity values received for each surface pixel or region of the image along the measurement path to determine, for each pixel, the location of the coherence peak shown in Figure 2. Once, the data processor 32 has determined the coherence peak for each pixel, then the

data processor 32 can determine, using the known relative heights at which the images were captured, the relative heights of the different coherence peaks and thus the surface typography of the sample being measured.

5

The control apparatus 30 may then cause the surface topography to be displayed on the display 36a, for example one or more surface profile cross-sections may be displayed using, for example, the Talymap software supplied by Taylor Hobson Limited, Leicester, England.

10

As another possibility, or additionally, the display may display a bitmap image in which each surface pixel is represented as a display pixel having a colour or saturation dependent on the corresponding relative height value. In this case, the display may display the bitmap image in a manner analogous to the image displayed during set up so that the majority of the height values are represented by different shades of blue with any out of range values being displayed as yellow and any zero values (which may represent missing data) being displayed in red so that, if the image contains a large proportion of red pixels, this alerts the user to the fact that the measurement data may not be reliable. This height representation bitmap image may be enhanced by using gradient data in a manner similar to that described above with reference to Figure 9 for the intensity value bitmap with the height values taking the place of the intensity values and corresponding adjustments being made to the

15

20

25

constants in equations 1 and 1a. As a further possibility, the gradient enhancement techniques described and claimed in US Patents Nos 6031928 and 6345107 (the whole contents of which are hereby  
5 incorporated by reference) may be used. The techniques described and claimed in US Patents Nos 6031928 and 6345107 may also be used in place of that described above with reference to Figure 9 with the height values being replaced by intensity values.

10 The operator may then cause the support stage 9 to be moved by the X and/or Y movers to a different area of the surface and may then repeat the measurement operation for that different area to obtain surface typography data for  
15 that area.

Although a Windows type display is shown in Figure 8, it will, of course, be appreciated that other forms of graphical user interface may be used to display the set  
20 up functions available to the user or operator. Also, it will be appreciated that the specific arrangement of slider bars, check boxes and selectable buttons shown in Figure 8 is merely an example and that different combinations of such user interactive elements and/or  
25 user interactive elements such as drop down or pop up menus may be used. In addition, the set up display screen shown in Figure 8 may also include one or more further tabbed panes or screens that include further user controllable functions available to the operator such as

a measurement initiation operation screen and calibration screens for enabling calibration of the apparatus.

Where the control apparatus 30 is arranged to colour  
5 pixels of a displayed bitmap image in a predetermined  
manner in accordance with their respective illumination  
levels, then the display screen 500 may, as shown in  
phantom lines in Figure 8, include a colour swatch or bar  
700 located adjacent to the image display window in which  
10 the colours representing the various illumination levels  
from zero to saturated are displayed in order so that the  
operator can match the colours of an image displayed in  
the window 501 with colours on the colour swatch or bar  
700 to facilitate examination of the illumination level.  
15 In this case, the colour swatch or bar 700 may carry a  
pointer 701 defining the mid-range illumination level.

In the above described embodiments, the beam splitter 5  
may be a thin film beam splitter, in particular a Herpin  
20 filter, or a neutral density partially reflective metal  
filter, designed to have (over the required bandwidth and  
the expected angles of incidence) a reflectance of less  
than 50% so that a smaller proportion of the light is  
reflected than is transmitted. This may help compensate  
25 for the fact that, due to surface roughness or Fresnel  
reflectance, the reflectance of the sample surface 7 will  
generally be less than that of the reference mirror 6.  
Such a partially reflecting filter having a reflectance  
of about 20% should provide a good compromise in terms

of signal-to-noise for surfaces having a reflectance in the range from about 1% to 100%, enabling the surface topography of, for example, of both glass and metal surfaces to be examined.

5

In the above described embodiments, the Z mover 15 is a piezoelectric mover. It will, however, be appreciated that other forms of movers such as electric motors and the like may be used. In the above described  
10 embodiments, the X and Y movers 16 and 17 are electric motors controlled by the controller 21. It is, however, possible, that the X and Y movers 16 and 17 may be manually operable movement devices such as micrometer type ball and screw thread movement devices.

15

Where the surface to be measure has significant form, then the reference surface 6 may have the same general form; for example where the surface is a surface of an aspheric lens then the reference surface may be an  
20 aspheric surface of the same shape and the known shape of the reference may then be subtracted by the control apparatus from the resulting data to facilitate detection and analysis of smaller wavelength surface features such as surface roughness and texture.

25

The control apparatus 30 may also be configured to determine the form of the reference surface 6 where it is not known or not precisely known. In this case, the user or operator places a calibration surface of known

5 form, such as a precision optical flat, on the sample  
support stage and acquires a number of images at  
independent xy positions of the calibration surface.  
Because the reference surface is effectively subtracted  
from the sample surface and the sample surface is in this  
case an optical flat, the residual form and roughness in  
the acquired data will represent the form and roughness  
of the reference surface relative to the known optical  
flat. The control apparatus may be configured to average  
10 the acquired data over a number of images to remove or  
smooth out the roughness of the calibration surface. The  
control apparatus may be configured to fit a polynomial  
to the acquired data and to store the resulting  
polynomial coefficients as reference surface form data  
for later use to remove or at least reduce the effect on  
15 the end results of any form in the reference surface by,  
for example, subtracting the reference surface form data  
from data acquired from future sample surfaces. As  
another possibility, the control apparatus may be  
0 configured to store all the acquired data as reference  
surface form and roughness data so that both the  
reference surface form and roughness can be subtracted  
from data acquired for future samples surfaces.

5 In the above described examples, the end markers 511a  
and 511b simply indicate the beginning and end of the  
measurement part of the scan path. These may however be  
configured to be movable by the user to provide the user



with a further way of changing the measurement path start and end points.

5 In the above described example, a contrast reference may be used to enhance an image acquired during the set up procedure. Such a contrast reference image may also be used as a template to enable location of repeating patterns of features on the surface being measured as may arise, for example, in the case of a semiconductor wafer  
10 carrying a number of semiconductor devices each having the same surface topography pattern. In this case, the contrast reference is acquired when the surface features such as the grid shown in Figures 12a to 12d (but not any fringes) are in focus so that reference includes the  
15 surface features. The contrast reference button can then be selected when searching the surface for the repeating pattern. As the contrast reference frame image data is subtracted from an acquired frame of image data before display, the pattern will be highlighted or emphasized  
20 in the displayed image when the pattern is mis-aligned with the pattern in the contrast reference frame, so assisting the operator in locating the pattern.

25 Although in the above described embodiments, the data processing and control apparatus 3 is shown located close to the interferometer system 2, it will, of course, be appreciated that the data processing and control apparatus 3 may be located remotely from the interferometer system. Also, the data processor 32

itself, together with or separate from the user interface may be located remotely from at least one of the data processing and control apparatus 3 and the interferometer system. In the examples described above, the user interface forms part of the surface profiling apparatus. It may, however, be provided in a separate computing apparatus that communicates either locally or remotely. Remote communication may be achieved, for example via a wireless infrared or radio link or a via a network such as an Intranet or the Internet, using a web browser-like interface.

The Z axis datum may be replaced by a gantry or microscope-style support.

The techniques described above may also be applied to the surface profiling apparatus described and claimed in UK Patent Application No. 0206023.4, the whole contents of which are hereby incorporated by reference.

**CLAIMS**

1. Surface profiling apparatus for obtaining surface  
profile data for a sample surface, the apparatus  
5 comprising:

light source providing means for providing a light  
source;

light directing means for directing light from the  
light source providing means along a sample path towards  
10 the sample surface and along a reference path towards a  
reference surface such that light reflected by the sample  
surface and light reflected by the reference surface  
interfere;

moving means for moving at least one of the sample  
15 surface along the sample path and the reference surface  
along the reference path to effect relative movement  
between the sample surface and the reference surface  
along a measurement path;

sensing means for sensing light intensity resulting  
20 from interference between light reflected from the  
reference surface and regions of the sample surface to  
provide a set of light intensity data comprising light  
intensity data values with each light intensity data  
value representing the sensed light intensity associated  
25 with a corresponding one of said regions, the sensing  
means being arranged to sense light intensity at  
intervals along the measurement path to provide a number  
of sets of such light intensity data;

data processing means for processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region; and

surface profile determining means for determining from the positions at which the predetermined feature occurs in the light intensity data for the different sensed regions the relative surface heights of the different sensed regions to provide a surface profile,

the apparatus further comprising:

display means for displaying image data representing a set of light intensity data;

image enhancing means for enhancing the image data to facilitate the detection by a user of the interference fringes; and

user operable control means for controlling operation of the image enhancing means.

2. Apparatus according to claim 1, wherein the image enhancing means comprises gradient determining means for determining from a set of light intensity data light intensity gradient data and modifying means for modifying the image data to be displayed in accordance with the determined gradient data.

3. Apparatus according to claim 1, wherein the image enhancing means comprises contrast determining means for

determining contrast difference data by comparing the set of light intensity data with a reference set of light intensity data and modifying means for modifying the image data to be displayed in accordance with the determined contrast difference data.

4. Apparatus according to claim 1, wherein the image enhancing means comprises gradient determining means for determining from a set of light intensity data light intensity gradient data, contrast determining means for determining contrast difference data by comparing the set of light intensity data with a reference set of light intensity data and modifying means for modifying the image data to be displayed in accordance with the determined gradient data and contrast difference data.

5. Apparatus according to claim 2 or 4, wherein the gradient determining means is arranged to determine local gradient data associated with a light intensity data value by comparing the light intensity data values associated with regions on either side of the region that provided the light intensity data value.

6. Apparatus according to claim 2 or 4, wherein the regions are arranged in a rectangular array and the gradient determining means is arranged to determine local gradient data associated with a light intensity data value by comparing the light intensity data values associated with regions at respective ends of a diagonal

containing the region associated with the light intensity data value.

5 7. Apparatus according to claim 2 or 4, wherein the regions are arranged in a rectangular xy array and the gradient determining means is arranged to determine local gradient data associated with a light intensity data value associated with a region at coordinates x,y in the array by comparing the light intensity data values  
10 associated with regions at coordinates x+1, y+1 and x-1, y-1.

15 8. Apparatus according to claim 2, wherein the regions are arranged in a rectangular xy array and the modifying means is arranged to determine a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates x,y in accordance with:

$$I_M = 64 + I/2 + (I_{-1} - I_{+1})x4$$

20 where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates x+1, y+1 and x-1, y-1.

25 9. Apparatus according to claim 3 or 4, wherein the contrast determining means is arranged to determine the contrast difference data by subtracting from the intensity data value  $I$  of the set the corresponding intensity data value  $I_R$  of the reference set.

10. Apparatus according to claim 3, wherein the modifying means is arranged to determine a modified intensity data value  $I_M$  for a light intensity data value  $I$  in accordance with:

5

$$I_M = 64 + I/2 + (I - I_R) \times 4$$

where  $I_R$  is the corresponding intensity data value of the reference set.

10

11. Apparatus according to claim 4, wherein the regions are arranged in a rectangular xy array and the modifying means is arranged to determine a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates x,y in accordance with:

15

$$I_M = 64 + I/2 + (I - I_R) \times 4 + (I_{-1} - I_{+1}) \times 4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates x+1, y+1 and x-1, y-1 and  $I_R$  is the corresponding intensity data value of the reference set.

20

12. Apparatus according to any of claims 3, 4, 9, 10, 11, further comprising user operable means for selecting the reference set.

25

13. Apparatus according to any of the preceding claims, wherein the image enhancing means comprises user-

selectable filter means for restricting the wavelength range of the light source.

5 14. Apparatus according to claim 13, wherein the user-selectable filter means comprises a filter assembly mounted in a light path from the light source and having a user movable filter carrier for enabling the user to move a filter into and out of the light path.

10 15. Apparatus according to claim 14, wherein the filter carrier comprises a rotatable disc member having one or more filters eccentrically mounted thereto.

15 16. Surface profiling apparatus for obtaining surface profile data for a sample surface, the apparatus comprising:

light source providing means for providing a light source;

20 light directing means for directing light from the light source providing means along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample surface and light reflected by the reference surface interfere;

25 moving means for moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;



sensing means for sensing light intensity resulting from interference between light reflected from the reference surface and a two-dimensional array of regions of the sample surface to provide a set of light intensity data comprising light intensity data values, each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions and each light intensity data value being one of a number of different values dependent upon the sensed light intensity, the sensing means being arranged to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

data processing means for processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region; and surface profile determining means for determining from the positions at which the predetermined feature occurs in the intensity data for the different sensed regions the relative surface heights of the different sensed regions to provide the surface profile,

the apparatus further comprising:

display means for displaying image data representing a set of light intensity data;

image data generating means for generating image data to be displayed from the light intensity data values

of a set of light intensity data, the image data generating means being arranged to cause the majority of the light intensity data values to appear to be represented by a single colour with the apparent lightness of the colour varying with the light intensity data value such that the lightness either increases or decreases with increase in the light intensity data value and to cause at least one of a light intensity data value representing a highest light intensity, a light intensity data value representing a lowest light intensity and light intensity data values representing midrange light intensities to be displayed so as to appear to be of a different colour to enable the user to identify the light intensity level represented by that light intensity data value.

17. Apparatus according to claim 16, further comprising user-operable control means for enabling a user to control a light output intensity of the light source.

18. Apparatus according to claim 16 or 17, wherein the highest level represents saturation light intensity and the lowest represents zero light intensity.

19. Apparatus according to claim 16, 17 or 18, wherein the image data generating means is arranged to cause at least two of the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest zero light intensity and

the light intensity data values representing midrange light intensities to be displayed so as to appear to be of different colours from the colour to enable the user to identify the light intensity level represented by that light intensity data value.

5

20. Apparatus according to claims 16, 17 or 18, wherein the image data generating means is arranged to cause the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest light intensity and the light intensity data values representing the midrange light intensities to be displayed so as to appear to be of different colours from the colour to enable the user to identify the light intensity level represented by that light intensity data value.

10

15

21. Apparatus according to any of claims 16 to 20, wherein the image data generating means is arranged to cause the light intensity data value representing the highest light intensity to be displayed so as to appear to be yellow.

20

22. Apparatus according to any of claims 16 to 21, wherein the image data generating means is arranged to cause the light intensity data value representing the lowest light intensity to be displayed so as to appear to be red

25

23. Apparatus according to any of claims 16 to 22,  
wherein the image data generating means is arranged to  
cause the light intensity data values representing the  
mid-range light intensities to be displayed so as to  
appear to be green.

24. Apparatus according to any of claims 16 to 23,  
wherein the image data generating means is arranged to  
cause the colour to be at least one of blue and grey.

25. An interferometer apparatus comprising:

light directing means for directing along a sample  
path towards the sample surface and along a reference  
path towards a reference surface such that light  
reflected by the sample surface and light reflected by  
the reference surface interfere;

moving means for moving at least one of the sample  
surface along the sample path and the reference surface  
along the reference path to effect relative movement  
between the sample surface and the reference surface  
along a measurement path;

sensing means for sensing light intensity resulting  
from interference between light reflected from the  
reference surface and regions of the sample surface to  
provide a set of light intensity data comprising light  
intensity data values with each light intensity data  
value representing the sensed light intensity associated  
with a corresponding one of said regions, the sensing  
means being arranged to sense light intensity at

intervals along the measurement path to provide a number of sets of such light intensity data;

data processing means for processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region  
5 a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region;

image enhancing means for enhancing image data to  
10 be displayed on a display to facilitate the detection by a user of the interference fringes in image data; and

user operable control means for controlling operation of the image enhancing means.

15 26. An interferometer data processing apparatus comprising:

receiving means for receiving sets of light intensity data values resulting from interference between light reflected from the reference surface and regions  
20 of the sample surface with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions and each set of light intensity data values representing the light intensity sensed a different one of a number of intervals  
25 along a measurement path;

data processing means for processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a

predetermined feature occurs in the light intensity data for that sensed region;

image enhancing means for enhancing the image data to be displayed on a display to facilitate the detection by a user of the interference fringes in image data; and

user operable control means for controlling operation of the image enhancing means.

27. An interferometer user interface apparatus comprising:

receiving means for receiving a set of light intensity data values resulting from interference between light reflected from the reference surface and regions of the sample surface with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions;

image enhancing means for enhancing the image data to be displayed on a display to facilitate the detection by a user of the interference fringes in image data; and

user operable control means for controlling operation of the image enhancing means.

28. Apparatus according to claim 25, 26 or 27, wherein the image enhancing means comprises gradient determining means for determining from a set of light intensity data light intensity gradient data and modifying means for modifying the image data to be displayed in accordance with the determined gradient data.

29. Apparatus according to claim 25, 26 or 27, wherein the image enhancing means comprises contrast determining means for determining contrast difference data by comparing the set of light intensity data with a reference set of light intensity data and modifying means for modifying the image data to be displayed in accordance with the determined contrast difference data.

30. Apparatus according to claim 25, 26 or 27, wherein the image enhancing means comprises gradient determining means for determining from a set of light intensity data light intensity gradient data, contrast determining means for determining contrast difference data by comparing the set of light intensity data with a reference set of light intensity data and modifying means for modifying the image data to be displayed in accordance with the determined gradient data and contrast difference data.

31. Apparatus according to claim 28 or 30, wherein the gradient determining means is arranged to determine local gradient data associated with a light intensity data value by comparing the light intensity data values associated with regions on either side of the region that provided the light intensity data value.

32. Apparatus according to claim 28 or 30, wherein the regions are arranged in a rectangular array and the gradient determining means is arranged to determine local gradient data associated with a light intensity data

value by comparing the light intensity data values associated with regions at respective ends of a diagonal containing the region associated with the light intensity data value.

5

10

33. Apparatus according to claim 28 or 30, wherein the regions are arranged in a rectangular xy array and the gradient determining means is arranged to determine local gradient data associated with a light intensity data value associated with a region at coordinates x,y in the array by comparing the light intensity data values associated with regions at coordinates x+1, y+1 and x-1, y-1.

15

34. Apparatus according to claim 28, wherein the regions are arranged in a rectangular xy array and the modifying means is arranged to determine a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates x,y in accordance with:

20

$$I_M = 64 + I/2 + (I_{-1} - I_{+1})x4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates x+1, y+1 and x-1, y-1.

25

35. Apparatus according to claim 29 or 30, wherein the contrast determining means is arranged to determine the contrast difference data by subtracting from the



intensity data value  $I$  of the set the corresponding intensity data value  $I_R$  of the reference set.

5 36. Apparatus according to claim 29, wherein the modifying means is arranged to determine a modified intensity data value  $I_M$  for a light intensity data value  $I$  in accordance with:

$$I_M = 64 + I/2 + (I - I_R) \times 4$$

10

where  $I_R$  is the corresponding intensity data value of the reference set.

15 37. Apparatus according to claim 30, wherein the regions are arranged in a rectangular xy array and the modifying means is arranged to determine a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates  $x, y$  in accordance with:

20 
$$I_M = 64 + I/2 + (I - I_R) \times 4 + (I_{-1} - I_{+1}) \times 4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates  $x+1, y+1$  and  $x-1, y-1$  and  $I_R$  is the corresponding intensity data value of the reference set.

25

38. Apparatus according to any of claims 29, 30, 35, 36, or 37, further comprising user operable means for selecting the reference set.

39. Apparatus according to any of claims 25 to 38, wherein the image enhancing means comprises user-selectable filter means for restricting the wavelength range of the light source.

5

40. Apparatus according to claim 39, wherein the user-selectable filter means comprises a filter assembly mounted in a light path from the light source and having a user movable filter carrier for enabling the user to move a filter into and out of the light path.

10

41. Apparatus according to claim 40, wherein the filter carrier comprises a rotatable disc member having one or more filters eccentrically mounted thereto.

15

42. An interferometer user interface apparatus comprising:

receiving means for receiving a set of light intensity data values resulting from interference between light reflected from the reference surface and regions of a sample surface with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions and each light intensity data value being one of a number of different values dependent upon the sensed light intensity;

20

25

display pixel data generating means for generating display pixel data to be displayed on a display from the light intensity data values of a set of light intensity data, the display pixel data generating means being

arranged to cause the majority of the light intensity data values to be represented by what appears to the human eye to be a single colour with the apparent lightness of the colour varying with the light intensity data value such that the lightness either increases or decreases with increase in the light intensity data value and to cause at least one of a light intensity data value representing a highest light intensity, a light intensity data value representing a lowest light intensity and midrange light intensity data to be displayed in what appears to the human eye to be a different colour to enable the user to identify the light intensity level represented by that light intensity data value.

43. Apparatus according to claim 42, further comprising user-operable control means for enabling a user to control a light output intensity of the light source.

44. Apparatus according to claim 42 or 43, wherein the highest level represents saturation light intensity and the lowest represents zero light intensity.

45. Apparatus according to claim 42, 43 or 44, wherein the image data generating means is arranged to cause at least two of the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest zero light intensity and the light intensity data representing a midrange to be displayed so as to appear to be of different colours from

the colour to enable the user to identify the light intensity level represented by that light intensity data value.

- 5        46. Apparatus according to claim 42, 43 or 44, wherein  
the image data generating means is arranged to cause the  
light intensity data value representing the highest light  
intensity, the light intensity data value representing  
10       the lowest light intensity and the light intensity data  
representing the midrange to be displayed in different  
colours from each other and the colour to enable the user  
to identify the light intensity level represented by that  
light intensity data value or values.
- 15       47. Apparatus according to any of claims 42 to 46,  
wherein the image data generating means is arranged to  
cause the light intensity data value representing the  
highest light intensity to be displayed as yellow.
- 20       48. Apparatus according to any of claims 42 to 47,  
wherein the image data generating means is arranged to  
cause the light intensity data value representing the  
lowest light intensity to be displayed as red
- 25       49. Apparatus according to any of claims 42 to 48,  
wherein the image data generating means is arranged to  
cause the light intensity data representing mid-range  
light intensities to be displayed as green.

50. Apparatus according to any of claims 42 to 49, wherein the image data generating means is arranged to cause the colour to appear to be at least one of blue and grey.

5

51. Apparatus according to any of claims 25 to 50, further comprising a display.

10

52. Surface profiling apparatus for obtaining surface profile data for a sample surface, the apparatus comprising:

15

light directing means for directing light from a light source providing means along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample surface and light reflected by the reference surface interfere;

20

moving means for moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;

25

sensing means for sensing light intensity resulting from interference between light reflected from the reference surface and regions of the sample surface to provide a set of light intensity data comprising light intensity data values with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions, the sensing

means being arranged to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

5 data processing means for processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region, the data processing means being  
10 operable to generate, using gradient data derived from the light intensity data, display data for causing each surface region to be represented on a display by a corresponding display pixel such that the relative heights of the said surface region can be visually  
15 distinguished.

53. Apparatus according to claim 52, wherein the data processing means is arranged to modify the intensity value data in accordance with local gradient data to  
20 produce the display data.

54. Surface profiling apparatus for obtaining surface profile data for a sample surface, the apparatus comprising:

25 light directing means for directing light from a light source providing means along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample

surface and light reflected by the reference surface interfere;

5 moving means for moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;

10 sensing means for sensing light intensity resulting from interference between light reflected from the reference surface and regions of the sample surface to provide a set of light intensity data comprising light intensity data values with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions, the sensing means being arranged to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

15 data processing means for processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region, the data processing means being operable to extract a form of the reference surface from the sets of light intensity data.

20 25 55. An interferometer filter assembly comprising a housing having a filter carrier mounted in the housing so as to be rotatable about an axis, the filter carrier

having a plurality of filters spaced around the axis and having a peripheral surface provided with land portions each associated with a corresponding filter and each distinguishable by a user for allowing a user to rotate the filter carrier to bring a selected filter to a predetermined position.

56. An assembly according to claim 55, wherein the lands are distinguishable by touch.

57. An assembly according to claim 55 or 56, wherein rotation of the filter carrier is indexed.

58. Apparatus according to any of claims 1 to 54 having a filter assembly according to claim 55, 56 or 57.

59. A method for obtaining surface profile data for a sample surface, the method comprising:

directing light along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample surface and light reflected by the reference surface interfere;

moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;



sensing light intensity resulting from interference between light reflected from the reference surface and regions of the sample surface to provide a set of light intensity data comprising light intensity data values with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions so as to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region; and

determining from the positions at which the predetermined feature occurs in the light intensity data for the different sensed regions the relative surface heights of the different sensed regions to provide a surface profile,

the method further comprising:

displaying image data representing a set of light intensity data;

enhancing the image data to facilitate the detection by a user of the interference fringes in response to operation of a user operable control.

60. A method according to claim 59, wherein the image enhancing comprises determining from a set of light intensity data light intensity gradient data and

modifying the image data to be displayed in accordance with the determined gradient data.

5 61. A method according to claim 59, wherein the image enhancing comprises determining contrast difference data by comparing the set of light intensity data with a reference set of light intensity data and modifying the image data to be displayed in accordance with the determined contrast difference data.

10 62. A method according to claim 59, wherein the image enhancing comprises determining from a set of light intensity data light intensity gradient data, determining contrast difference data by comparing the set of light  
15 intensity data with a reference set of light intensity data and modifying the image data to be displayed in accordance with the determined gradient data and contrast difference data.

20 63. A method according to claim 60 or 62, wherein the gradient determining determines local gradient data associated with a light intensity data value by comparing the light intensity data values associated with regions on either side of the region that provided the light  
5 intensity data value.

64. A method according to claim 60 or 62, wherein the regions are arranged in a rectangular array and the gradient determining determines local gradient data

associated with a light intensity data value by comparing the light intensity data values associated with regions at respective ends of a diagonal containing the region associated with the light intensity data value.

5

65. A method according to claim 60 or 62, wherein the regions are arranged in a rectangular xy array and the gradient determining determines local gradient data associated with a light intensity data value associated with a region at coordinates x,y in the array by comparing the light intensity data values associated with regions at coordinates x+1, y+1 and x-1, y-1.

10

15

66. A method according to claim 60, wherein the regions are arranged in a rectangular xy array and the modifying determines a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates x,y in accordance with:

20

$$I_M = 64 + I/2 + (I_{-1} - I_{+1})x4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates x+1, y+1 and x-1, y-1.

25

67. A method according to claim 61 or 62, wherein the contrast determining determines the contrast difference data by subtracting from the intensity data value  $I$  of the set the corresponding intensity data value  $I_R$  of the reference set.

68. A method according to claim 61, wherein the modifying determines a modified intensity data value  $I_M$  for a light intensity data value  $I$  in accordance with:

5 
$$I_M = 64 + I/2 + (I - I_R) \times 4$$

where  $I_R$  is the corresponding intensity data value of the reference set.

10 69. A method according to claim 62, wherein the regions are arranged in a rectangular xy array and the modifying determines a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates x,y in accordance with:

15 
$$I_M = 64 + I/2 + (I - I_R) \times 4 + (I_{-1} - I_{+1}) \times 4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates x+1, y+1 and x-1, y-1 and  $I_R$  is the corresponding intensity data value of the reference set.

20

70. A method according to any of claims 61, 62, 67, 68, 69, further comprising receiving input from a user operable control to select the reference set.

25

71. A method according to any of claims 59 to 70, wherein the image enhancing comprises restricting the wavelength range of the light source.

72. A method according to claim 71, wherein restricting the wavelength range of the light source is effected by a user rotating a filter assembly mounted in a light path to move a filter into and out of the light path.

5

73. A method according to claim 72, wherein the filter assembly comprises a rotatable disc member having one or more filters eccentrically mounted thereto.

10

74. A method for obtaining surface profile data for a sample surface, the method comprising:

15

directing light along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample surface and light reflected by the reference surface interfere;

20

moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;

25

sensing light intensity resulting from interference between light reflected from the reference surface and a two-dimensional array of regions of the sample surface to provide a set of light intensity data comprising light intensity data values, each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions and each light intensity data value being one of a number of different

values dependent upon the sensed light intensity so as to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

5        processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region; and

10        determining from the positions at which the predetermined feature occurs in the intensity data for the different sensed regions the relative surface heights of the different sensed regions to provide the surface profile,

15        the method further comprising:

20        generating image data for display from the light intensity data values of a set of light intensity data so as to cause the majority of the light intensity data values to appear to be represented by a single colour with the apparent lightness of the colour varying with the light intensity data value such that the lightness either increases or decreases with increase in the light intensity data value and to cause at least one of a light intensity data value representing a highest light intensity, a light intensity data value representing a lowest light intensity and light intensity data values representing midrange light intensities to be displayed  
25        so as to appear to be of a different colour to enable the

user to identify the light intensity level represented by that light intensity data value.

5 75. A method according to claim 74, further comprising enabling a user to control a light output intensity of the light source.

10 76. A method according to claim 74 or 75, wherein the highest level represents saturation light intensity and the lowest represents zero light intensity.

15 77. A method according to claim 74, 75 or 76, wherein the image data generating causes at least two of the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest zero light intensity and the light intensity data values representing midrange light intensities to be displayed so as to appear to be of different colours from the colour to enable the user to identify the light  
20 intensity level represented by that light intensity data value.

25 78. A method according to claim 74, 75 or 76, wherein the image data generating causes the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest light intensity and the light intensity data values representing the midrange light intensities to be displayed so as to appear to be of different colours from

the colour to enable the user to identify the light intensity level represented by that light intensity data value.

5        79. A method according to any of claims 74 to 78, wherein the image data generating causes the light intensity data value representing the highest light intensity to be displayed so as to appear to be yellow.

10       80. A method according to any of claims 74 to 79, wherein the image data generating causes the light intensity data value representing the lowest light intensity to be displayed so as to appear to be red

15       81. A method according to any of claims 74 to 80, wherein the image data generating causes the light intensity data values representing the mid-range light intensities to be displayed so as to appear to be green.

20       82. A method according to any of claims 74 to 81, wherein the image data generating causes the colour to be at least one of blue and grey.

83. A data processing method comprising:

25       directing along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample surface and light reflected by the reference surface interfere;



moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;

sensing light intensity resulting from interference between light reflected from the reference surface and regions of the sample surface to provide a set of light intensity data comprising light intensity data values with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions so as to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region;

enhancing image data to be displayed on a display to facilitate the detection by a user of the interference fringes in image data in response to user input.

84. A data processing method comprising:

receiving sets of light intensity data values resulting from interference between light reflected from the reference surface and regions of the sample surface with each light intensity data value representing the sensed light intensity associated with a corresponding

one of said regions and each set of light intensity data values representing the light intensity sensed a different one of a number of intervals along a measurement path;

5           processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region;

10           enhancing the image data to be displayed on a display to facilitate the detection by a user of the interference fringes in image data in response to user input.

15           85. An image data display method comprising:

            receiving a set of light intensity data values resulting from interference between light reflected from the reference surface and regions of the sample surface with each light intensity data value representing the  
20           sensed light intensity associated with a corresponding one of said regions;

            enhancing the image data to be displayed on a display to facilitate the detection by a user of the interference fringes in image data in response to  
25           operation of a user operable control.

86. A method according to claim 83, 84 or 85, wherein the image enhancing comprises determining from a set of light intensity data light intensity gradient data and

modifying the image data to be displayed in accordance with the determined gradient data.

5 87. A method according to claim 83, 84 or 85, wherein the image enhancing comprises determining contrast difference data by comparing the set of light intensity data with a reference set of light intensity data and modifying the image data to be displayed in accordance with the determined contrast difference data.

10 88. A method according to claim 83, 84 or 85, wherein the image enhancing comprises determining from a set of light intensity data light intensity gradient data, determining contrast difference data by comparing the set  
15 of light intensity data with a reference set of light intensity data and modifying the image data to be displayed in accordance with the determined gradient data and contrast difference data.

20 89. A method according to claim 86 or 88, wherein the gradient determining determines local gradient data associated with a light intensity data value by comparing the light intensity data values associated with regions on either side of the region that provided the light  
25 intensity data value.

90. A method according to claim 86 or 88, wherein the regions are arranged in a rectangular array and the gradient determining determines local gradient data

associated with a light intensity data value by comparing the light intensity data values associated with regions at respective ends of a diagonal containing the region associated with the light intensity data value.

5

91. A method according to claim 86 or 88, wherein the regions are arranged in a rectangular xy array and the gradient determining determines local gradient data associated with a light intensity data value associated with a region at coordinates x,y in the array by comparing the light intensity data values associated with regions at coordinates x+1, y+1 and x-1, y-1.

10

92. A method according to claim 86, wherein the regions are arranged in a rectangular xy array and the modifying determines a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates x,y in accordance with:

15

20

$$I_M = 64 + I/2 + (I_{-1} - I_{+1})x4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates x+1, y+1 and x-1, y-1.

25

93. A method according to claim 87 or 8, wherein the contrast determining determines the contrast difference data by subtracting from the intensity data value  $I$  of the set the corresponding intensity data value  $I_r$  of the reference set.

94. A method according to claim 87, wherein the modifying determines a modified intensity data value  $I_M$  for a light intensity data value  $I$  in accordance with:

5 
$$I_M = 64 + I/2 + (I - I_R) \times 4$$

where  $I_R$  is the corresponding intensity data value of the reference set.

10 95. A method according to claim 88, wherein the regions are arranged in a rectangular xy array and the modifying determines a modified intensity data value  $I_M$  for a light intensity data value  $I$  associated with the region at coordinates  $x, y$  in accordance with:

15 
$$I_M = 64 + I/2 + (I - I_R) \times 4 + (I_{-1} - I_{+1}) \times 4$$

where  $I_{-1}$  and  $I_{+1}$  are the intensity data values associated with the regions at coordinates  $x+1, y+1$  and  $x-1, y-1$  and  
20  $I_R$  is the corresponding intensity data value of the reference set.

96. A method according to any of claims 87, 88, 93, 94, or 95, further comprising receiving input from a user  
25 operable control for selecting the reference set.

97. An interference image display method comprising:  
receiving a set of light intensity data values  
resulting from interference between light reflected from

the reference surface and regions of a sample surface with each light intensity data value representing the sensed light intensity associated with a corresponding one of said regions and each light intensity data value being one of a number of different values dependent upon the sensed light intensity;

generating display pixel data to be displayed on a display from the light intensity data values of a set of light intensity data to cause the majority of the light intensity data values to be represented by what appears to the human eye to be a single colour with the apparent lightness of the colour varying with the light intensity data value such that the lightness either increases or decreases with increase in the light intensity data value and to cause at least one of a light intensity data value representing a highest light intensity, a light intensity data value representing a lowest light intensity and midrange light intensity data to be displayed in what appears to the human eye to be a different colour to enable the user to identify the light intensity level represented by that light intensity data value.

98. A method according to claim 97, wherein the image data generating causes at least two of the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest zero light intensity and the light intensity data representing a midrange to be displayed so as to appear to be of different colours from the colour to

enable the user to identify the light intensity level represented by that light intensity data value.

5 99. A method according to claim 97, wherein the image data generating causes the light intensity data value representing the highest light intensity, the light intensity data value representing the lowest light intensity and the light intensity data representing the midrange to be displayed in different colours from each  
10 other and the colour to enable the user to identify the light intensity level represented by that light intensity data value or values.

15 100. A surface profiling method, the method comprising:  
directing light along a sample path towards the sample surface and along a reference path towards a reference surface such that light reflected by the sample surface and light reflected by the reference surface interfere;

20 moving at least one of the sample surface along the sample path and the reference surface along the reference path to effect relative movement between the sample surface and the reference surface along a measurement path;

25 sensing light intensity resulting from interference between light reflected from the reference surface and regions of the sample surface to provide a set of light intensity data comprising light intensity data values with each light intensity data value representing the

sensed light intensity associated with a corresponding one of said regions so as to sense light intensity at intervals along the measurement path to provide a number of sets of such light intensity data;

5           processing the sets of light intensity data to determine from the light intensity data values associated with each sensed region a position along the measurement path at which a predetermined feature occurs in the light intensity data for that sensed region so as to generate,  
10           using gradient data derived from the light intensity data, display data for causing each surface region to be represented on a display by a corresponding display pixel such that the relative heights of the said surface region can be visually distinguished.

15           101. A method according to claim 100, wherein the data processing modifies the intensity value data in accordance with local gradient data to produce the display data.

20           102. A signal comprising processor-implementable instructions for causing processor means to carry out a method in accordance with any of claims 59 to 101.

25           103. A storage medium carrying processor-implementable instructions for causing processor means to carry out a method in accordance with any of claims 59 to 101.




**ABSTRACT****A SURFACE PROFILING APPARATUS**

Light is directed along a sample path towards the sample  
5 surface and along a reference path towards a reference  
surface such that light reflected by the sample surface  
and light reflected by the reference surface interfere.  
Relative movement is effected between the sample surface  
and the reference surface along a measurement path and  
10 the light intensity resulting from interference between  
light reflected from the reference surface and regions  
of the sample surface is sensed at intervals along the  
measurement path to provide a number of sets of light  
intensity data values with each light intensity data  
15 value representing the sensed light intensity associated  
with a corresponding one of said regions. The sets of  
light intensity data are processed to determine a  
position along the measurement path at which a  
predetermined feature occurs in the light intensity data  
20 for each sensed region and to enhance image data  
representing the intensity data to facilitate the  
detection by a user of the interference fringes.


**THIS PAGE BLANK (USPTO)**

FIG. 1

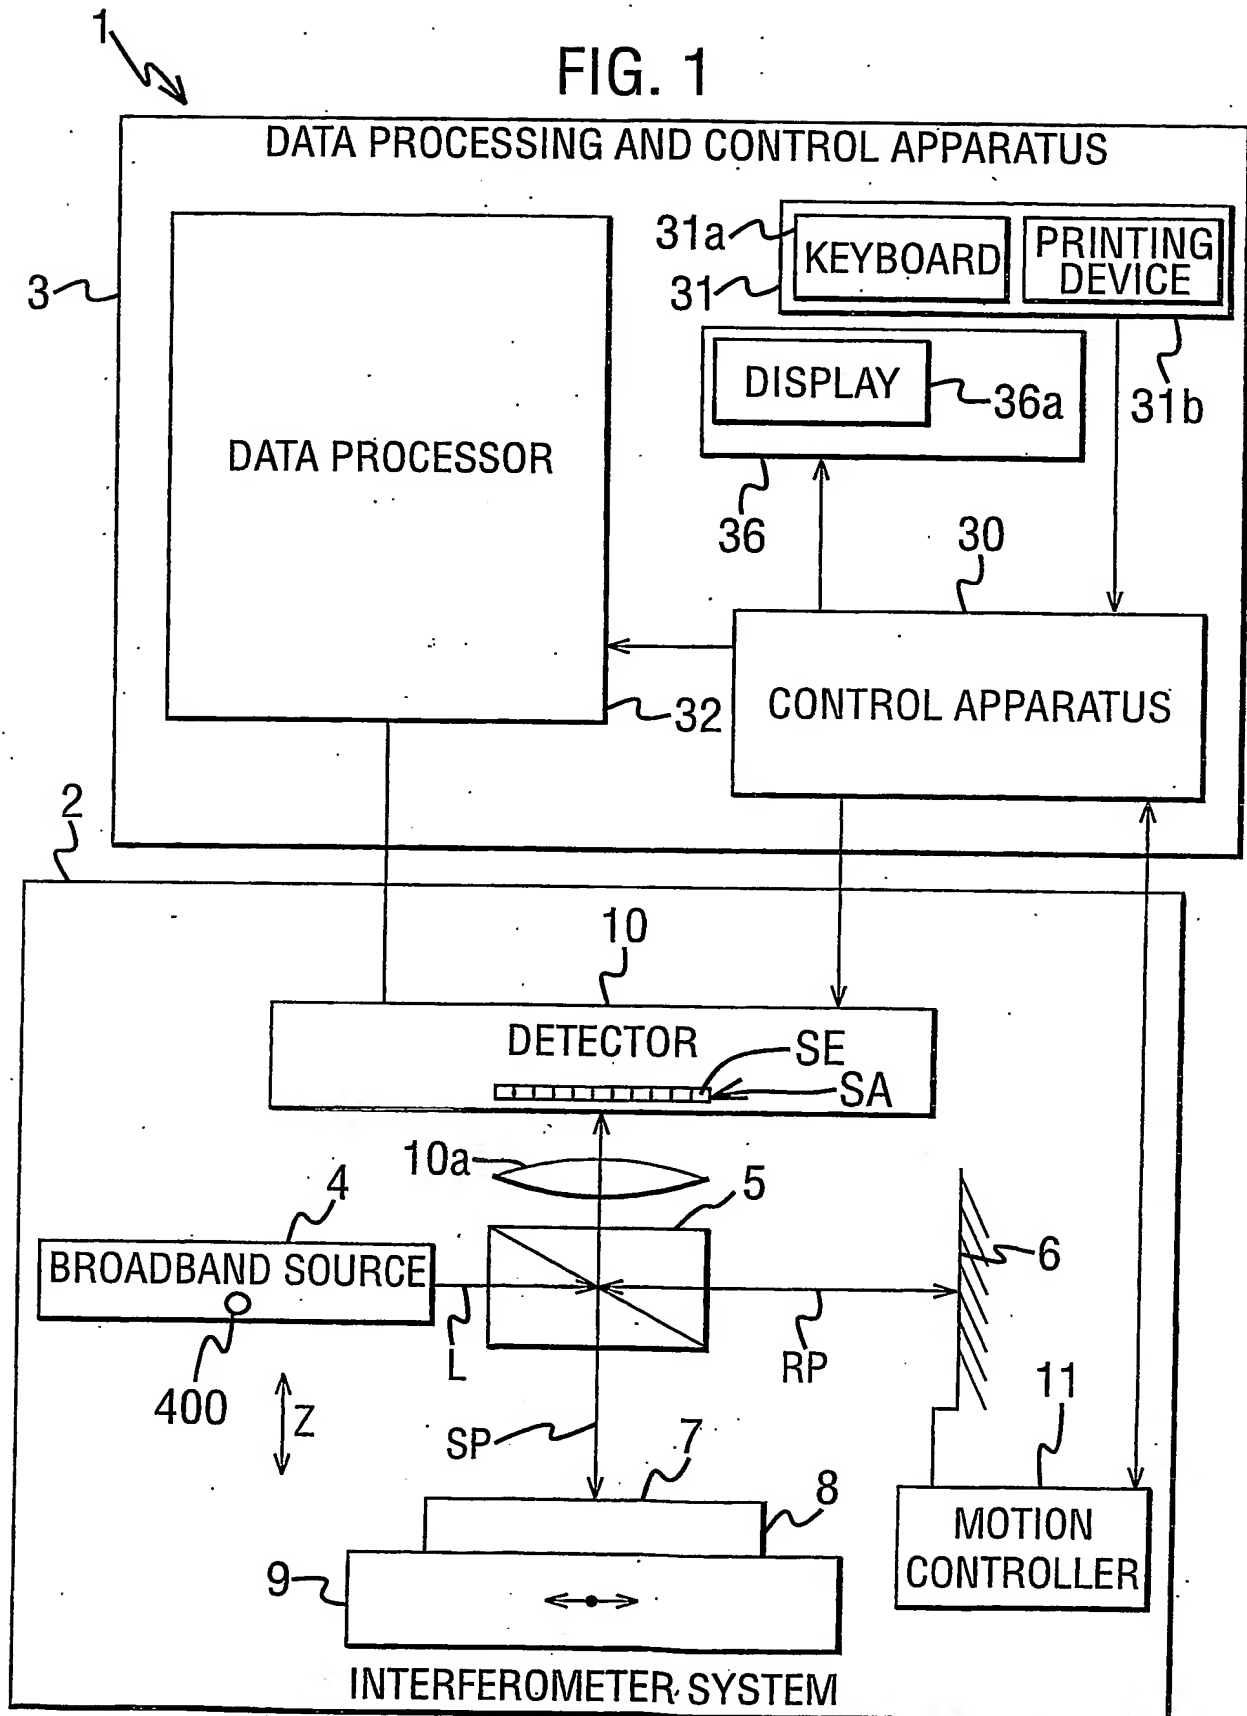

**THIS PAGE BLANK (USPTO)**

FIG. 2

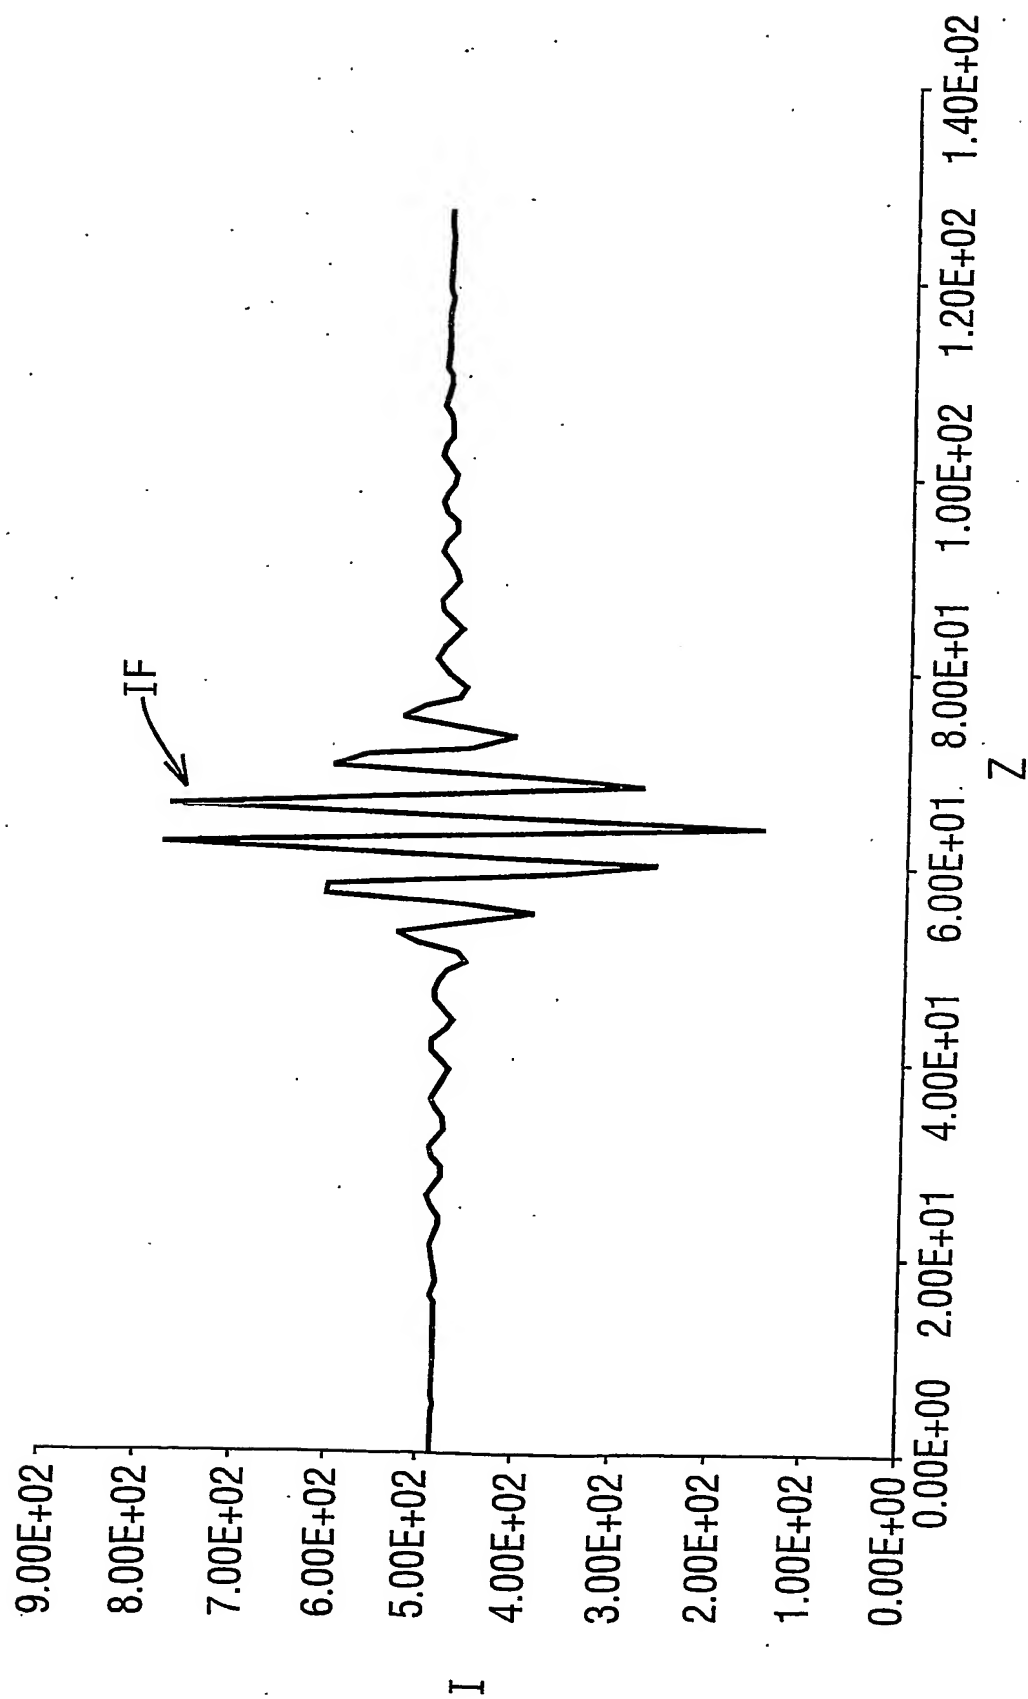


**THIS PAGE BLANK (USPTO)**

FIG. 3

2

3

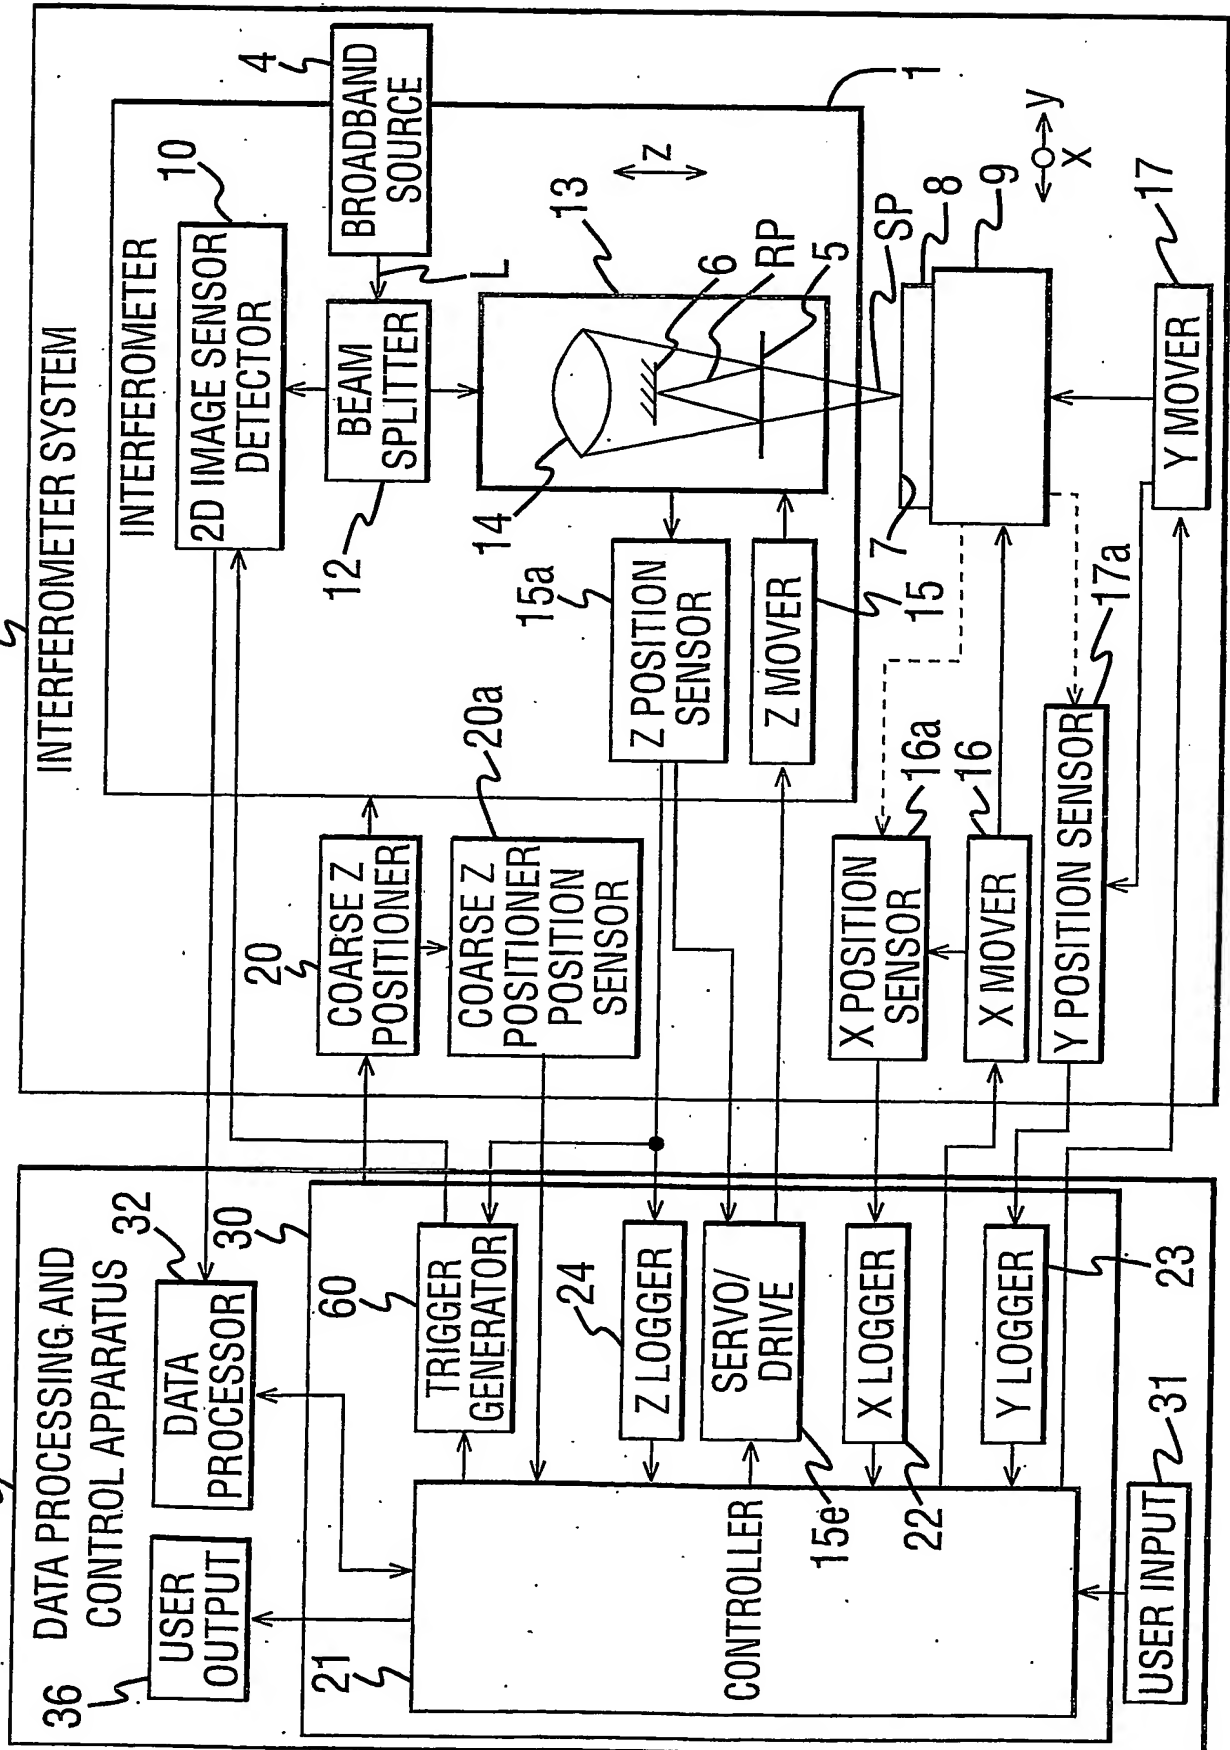

**THIS PAGE BLANK (USPTO)**




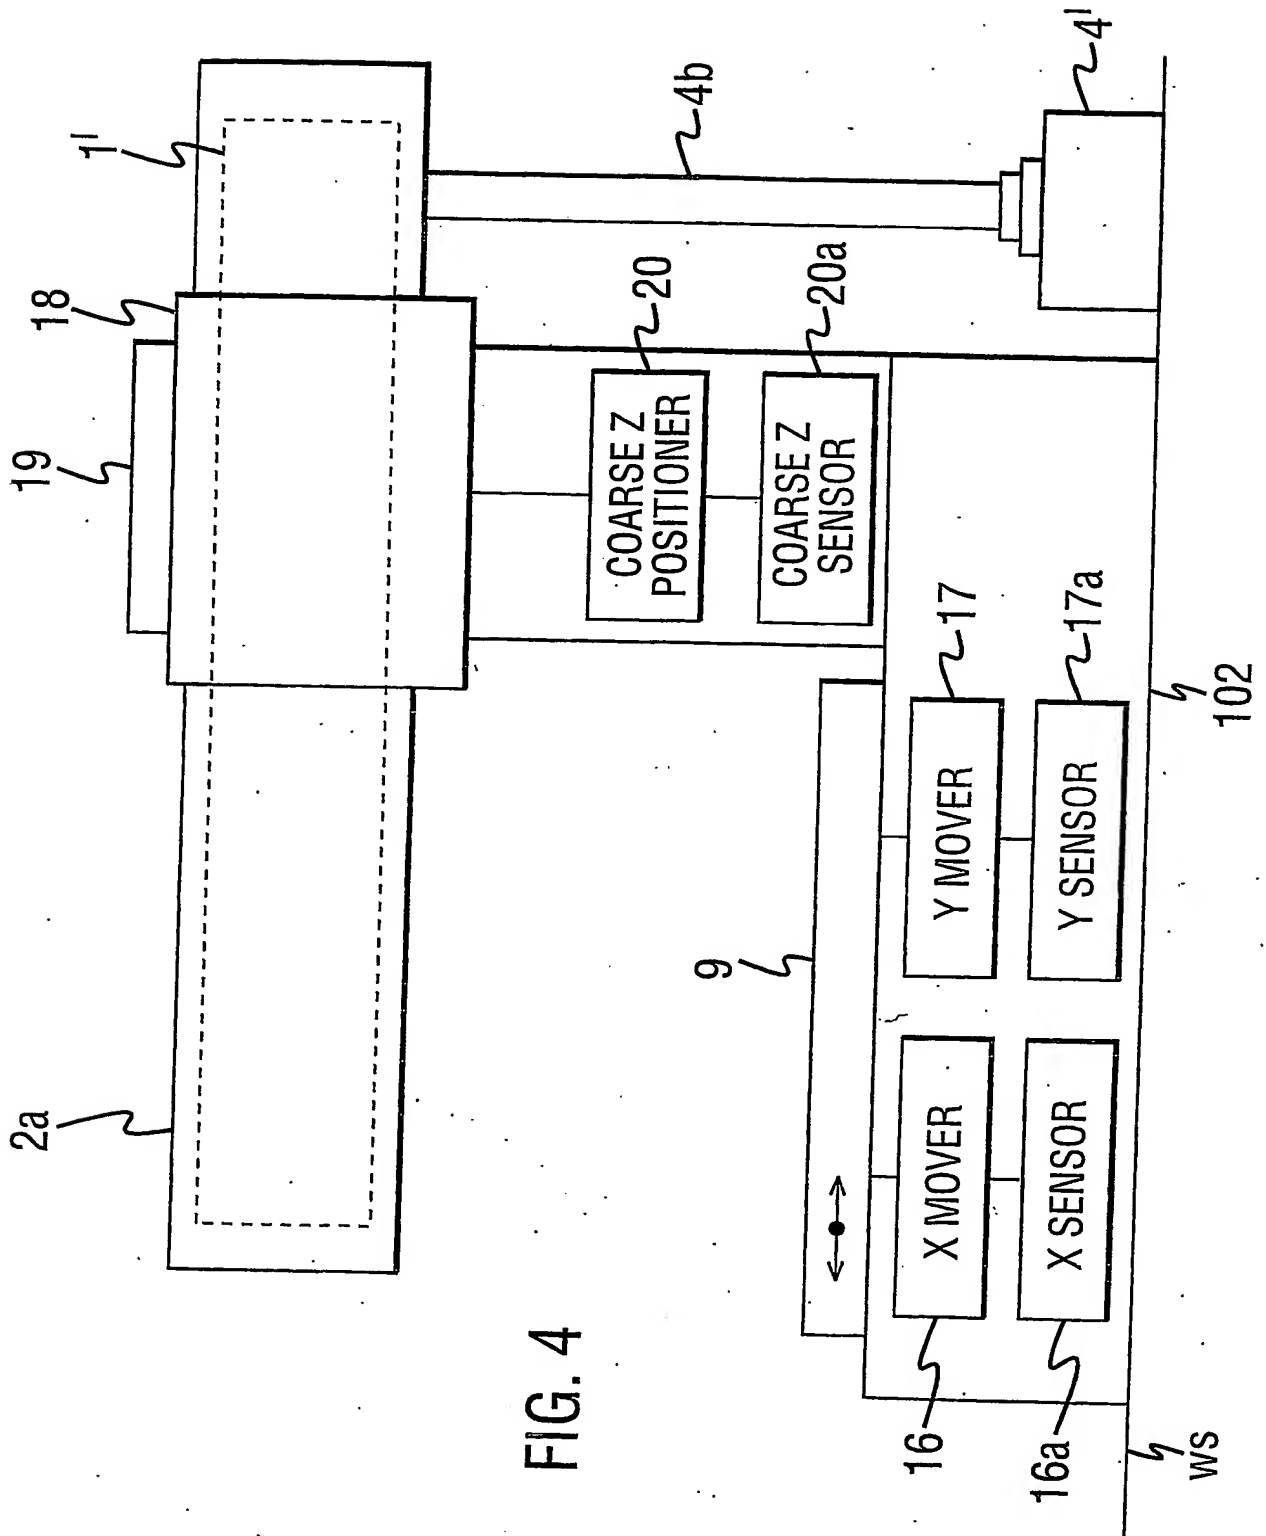



FIG. 4

**THIS PAGE BLANK (USPTO)**

FIG. 5

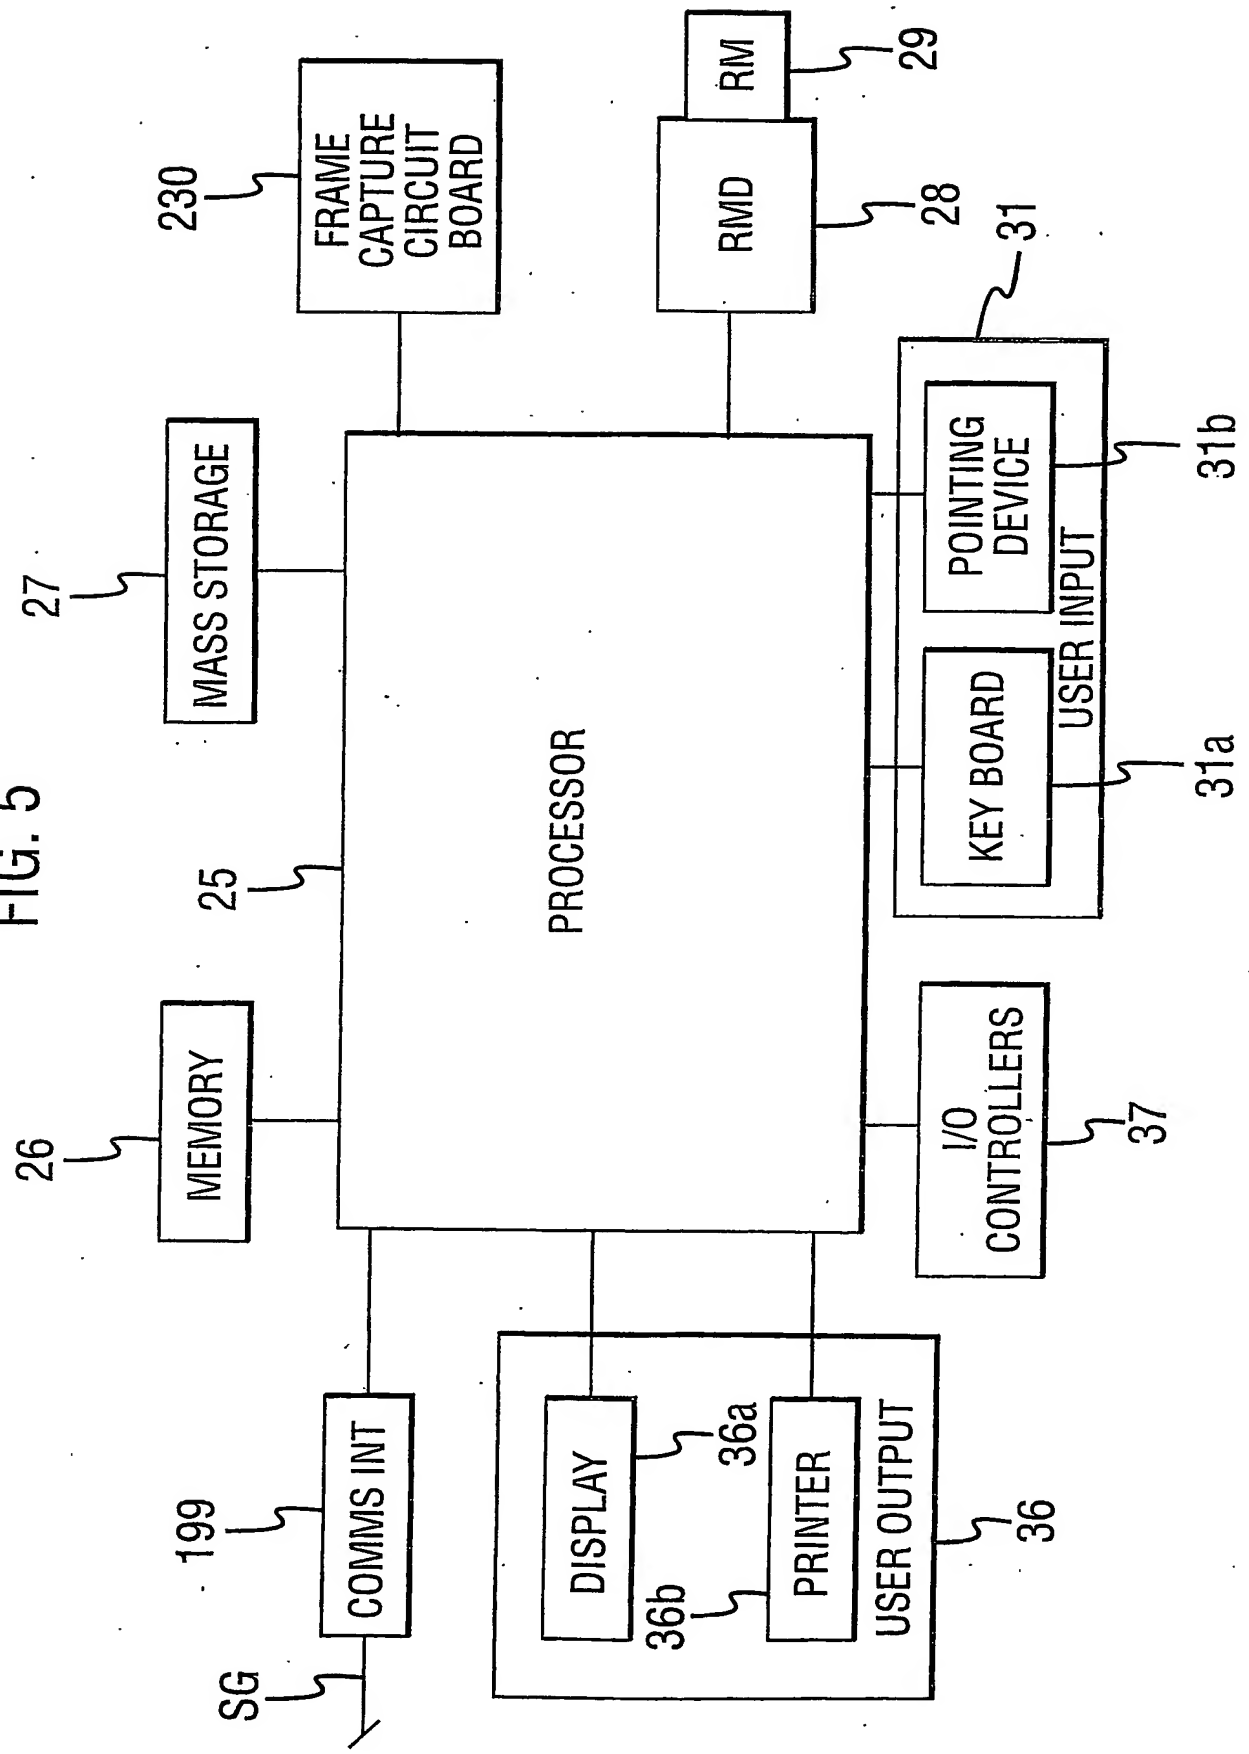


**THIS PAGE BLANK (USPTO)**

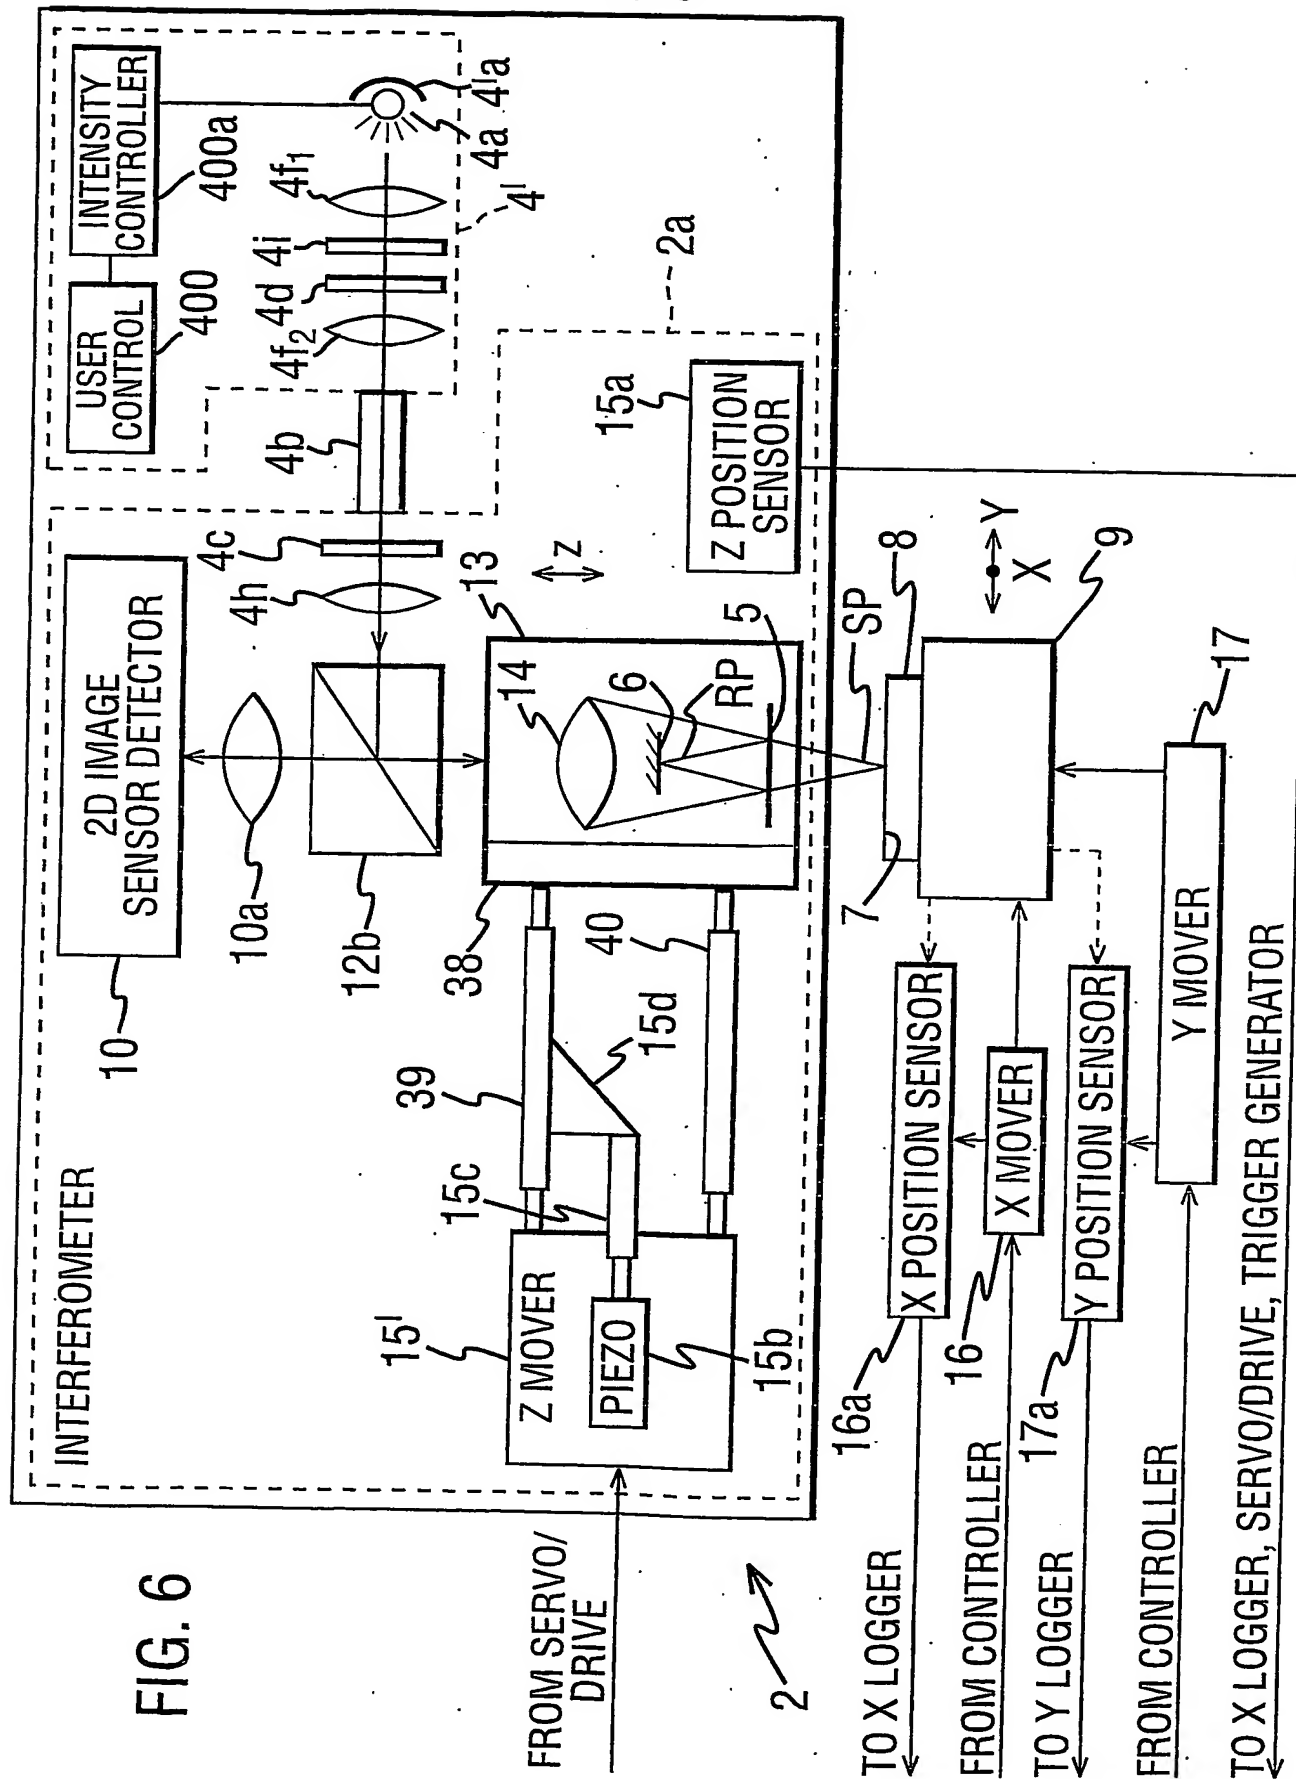

**THIS PAGE BLANK (USPTO)**

FIG. 7a

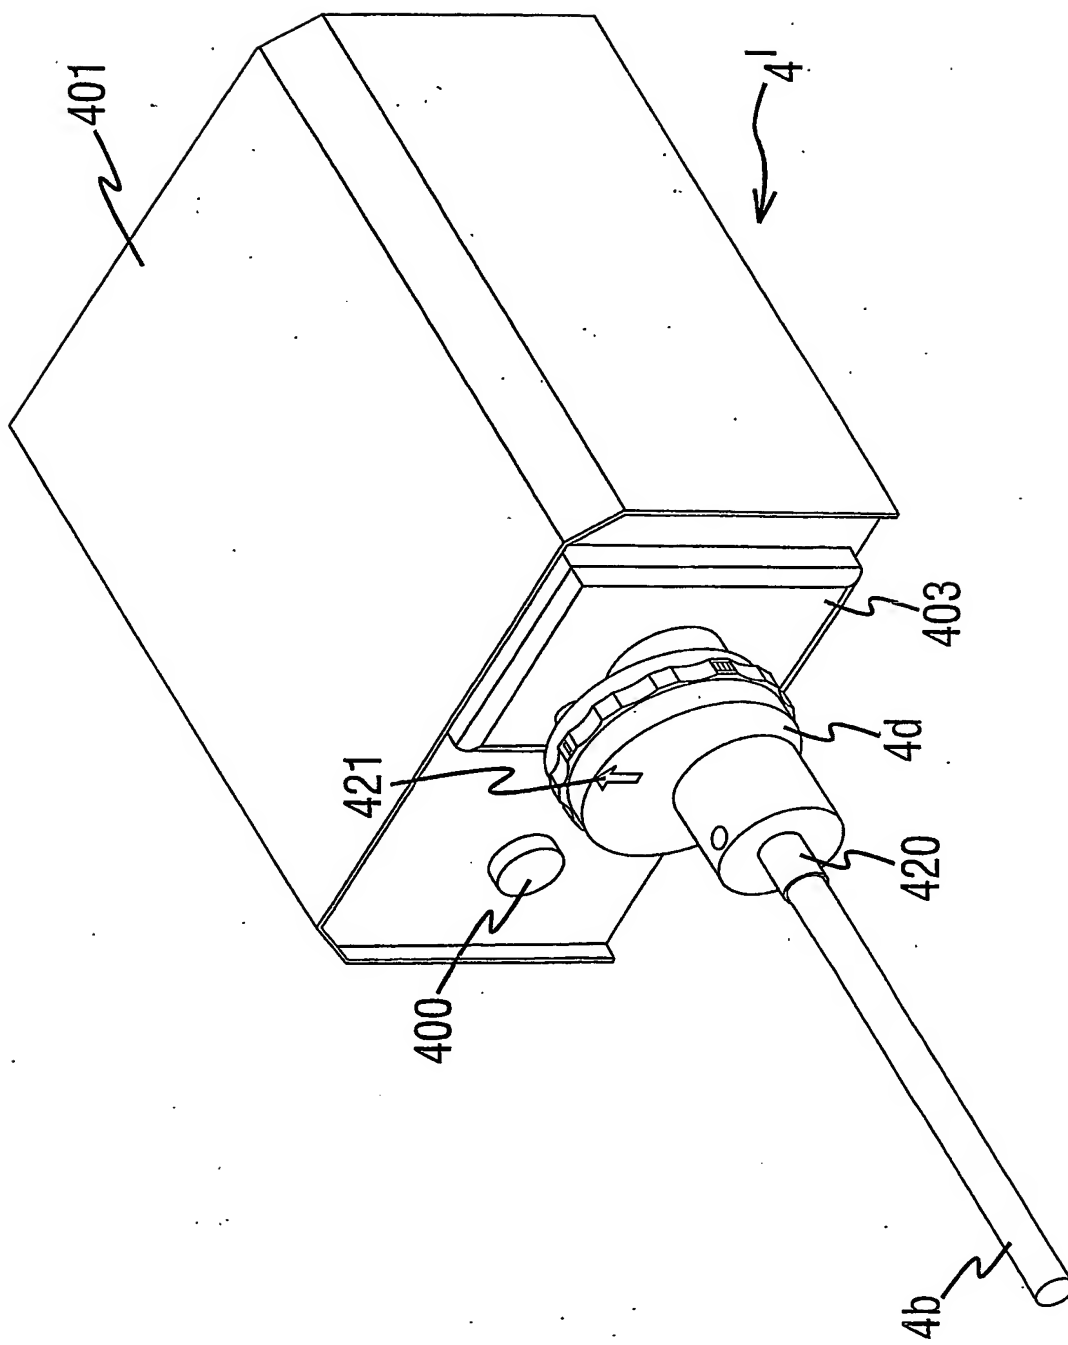

**THIS PAGE BLANK (USPTO)**




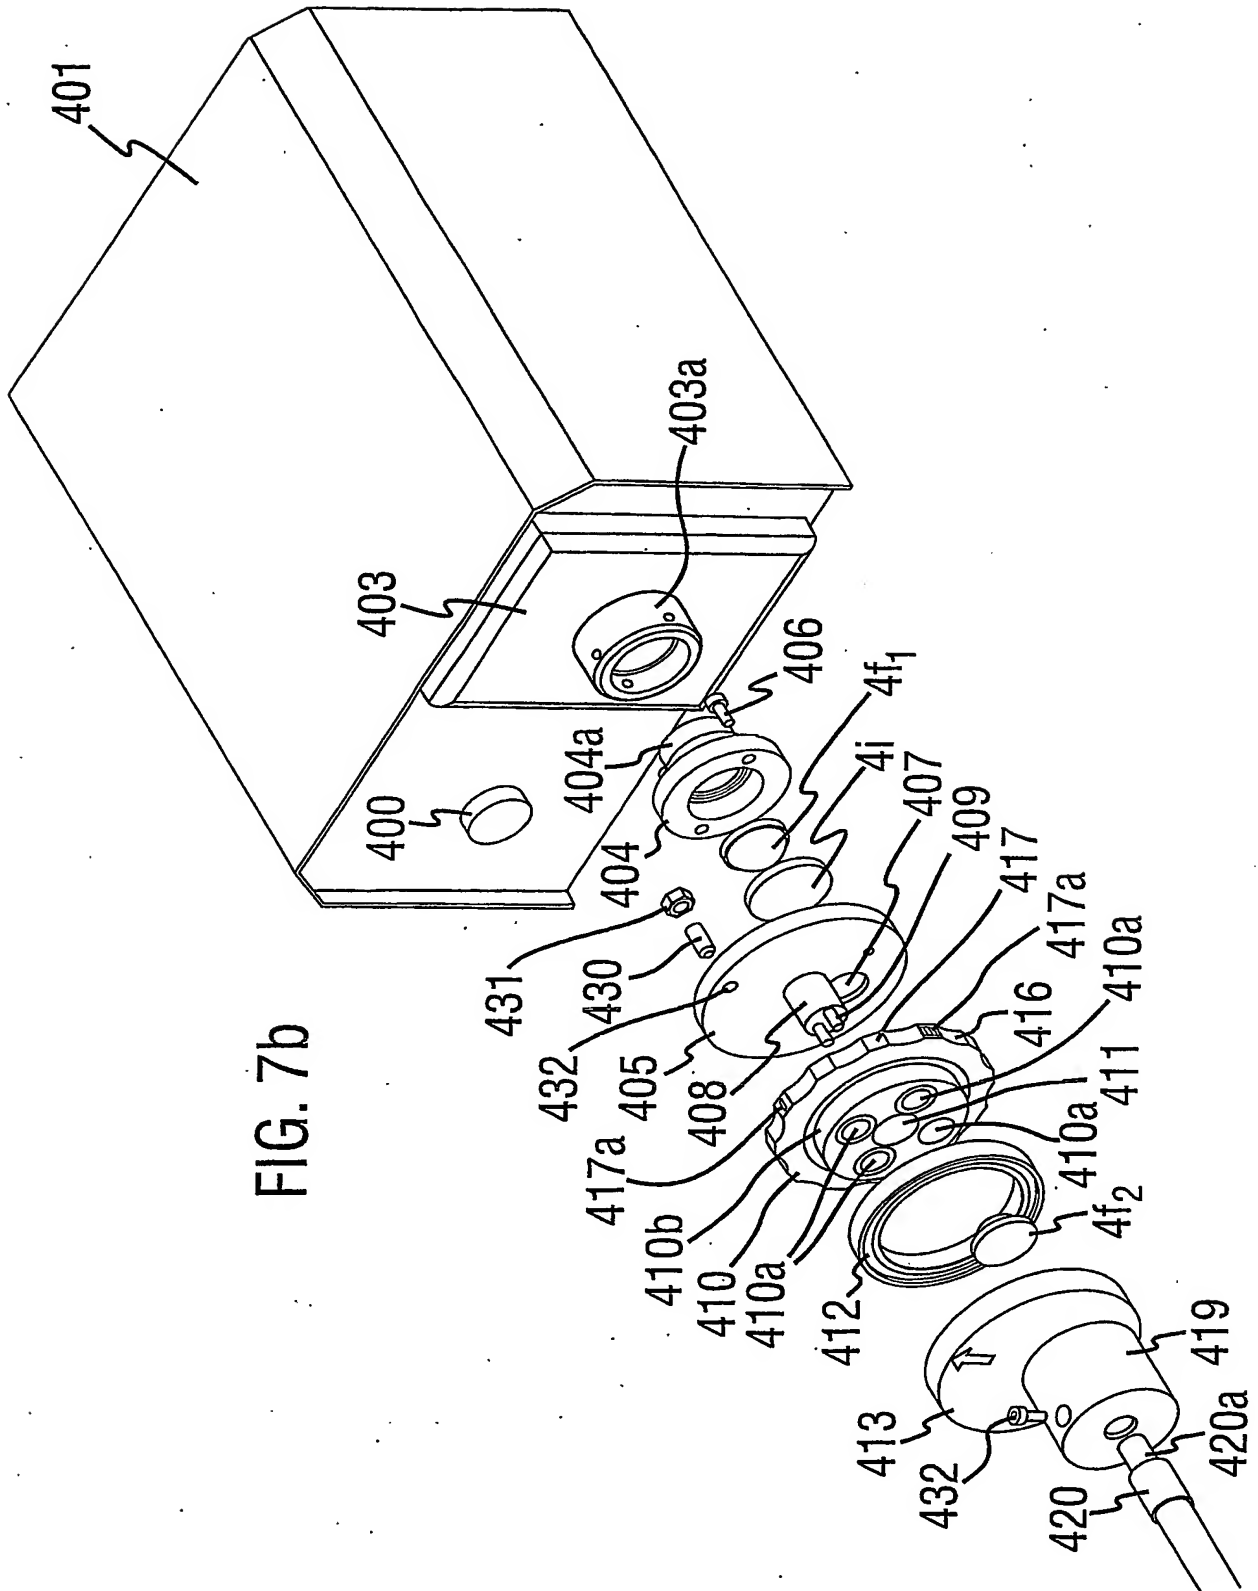


FIG. 7b


**THIS PAGE BLANK (USPTO)**

9/20

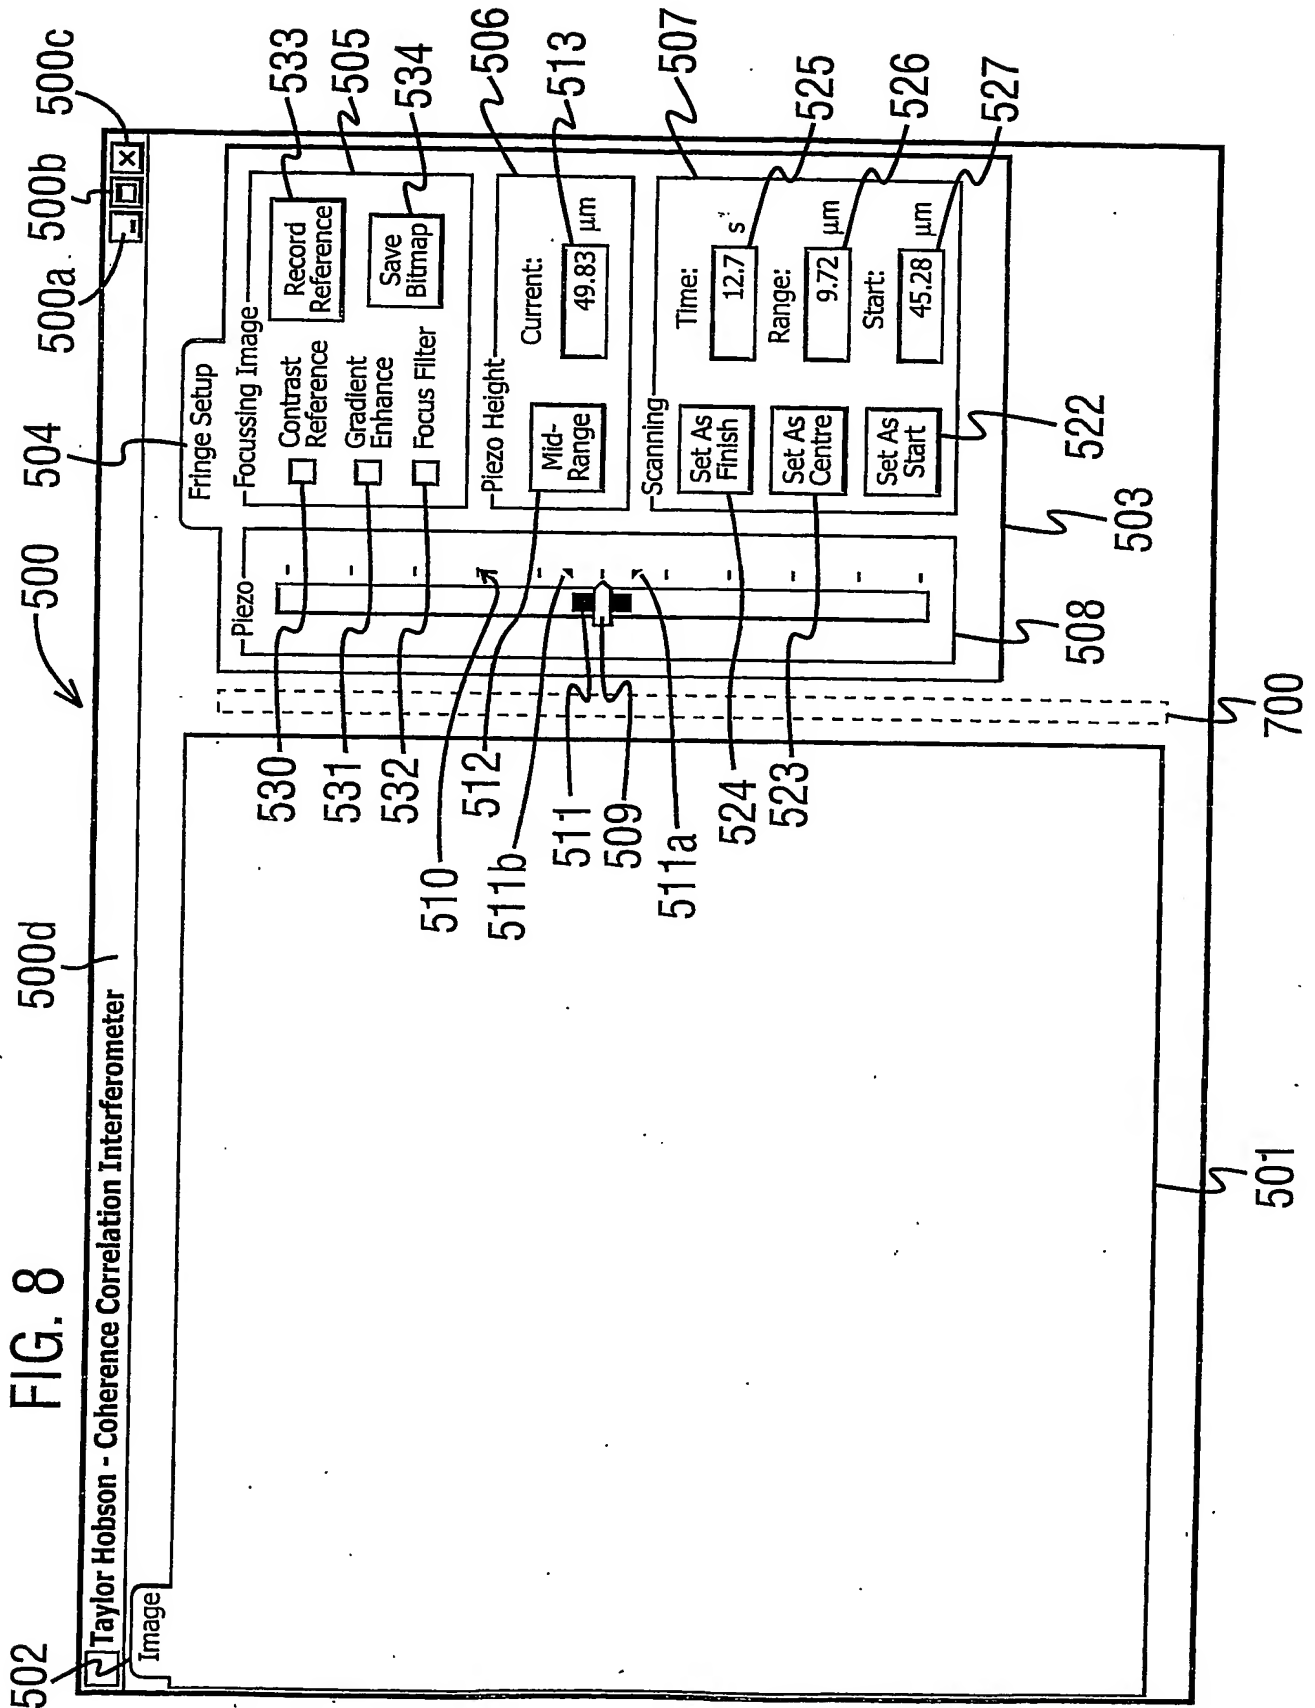

**THIS PAGE BLANK (USPTO)**


FIG. 9

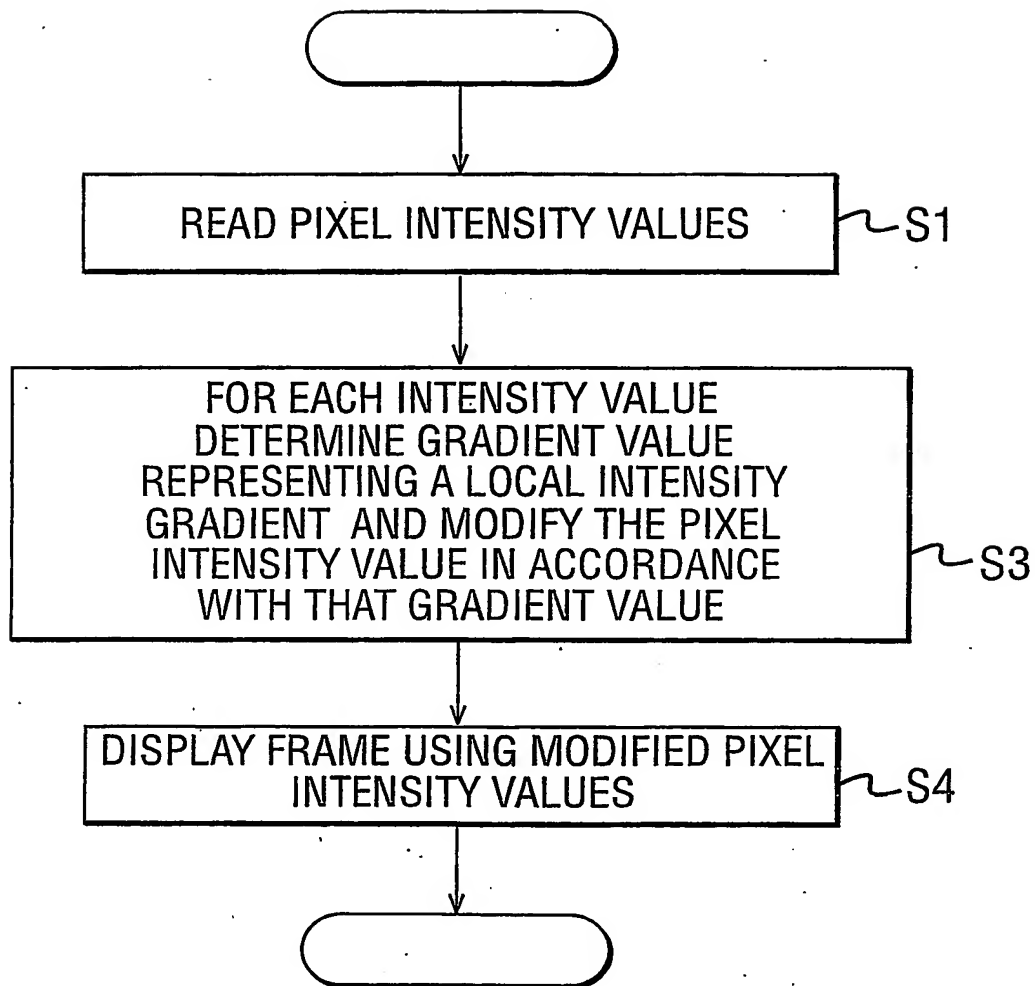

**THIS PAGE BLANK (USPTO)**

11/20


FIG. 10

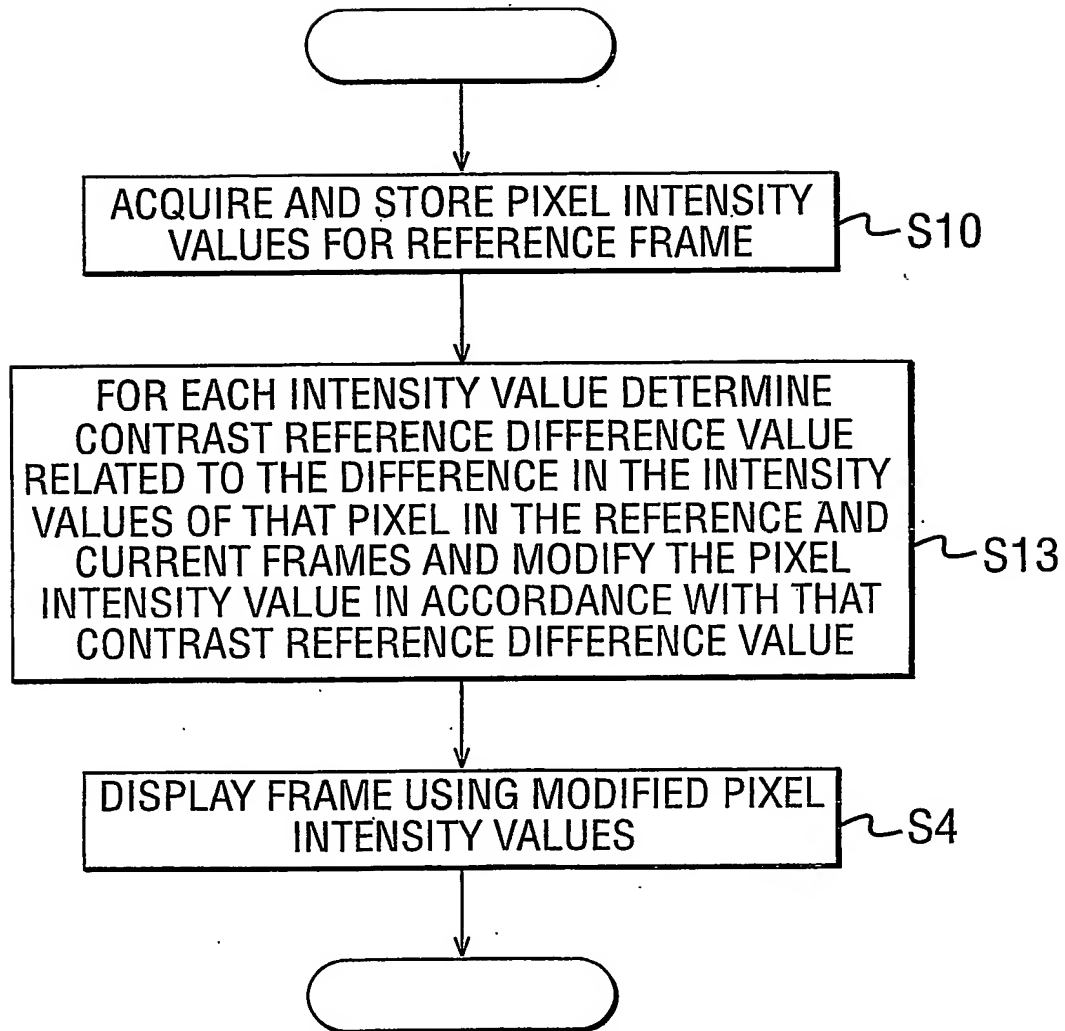

**THIS PAGE BLANK (USPTO)**



FIG. 11

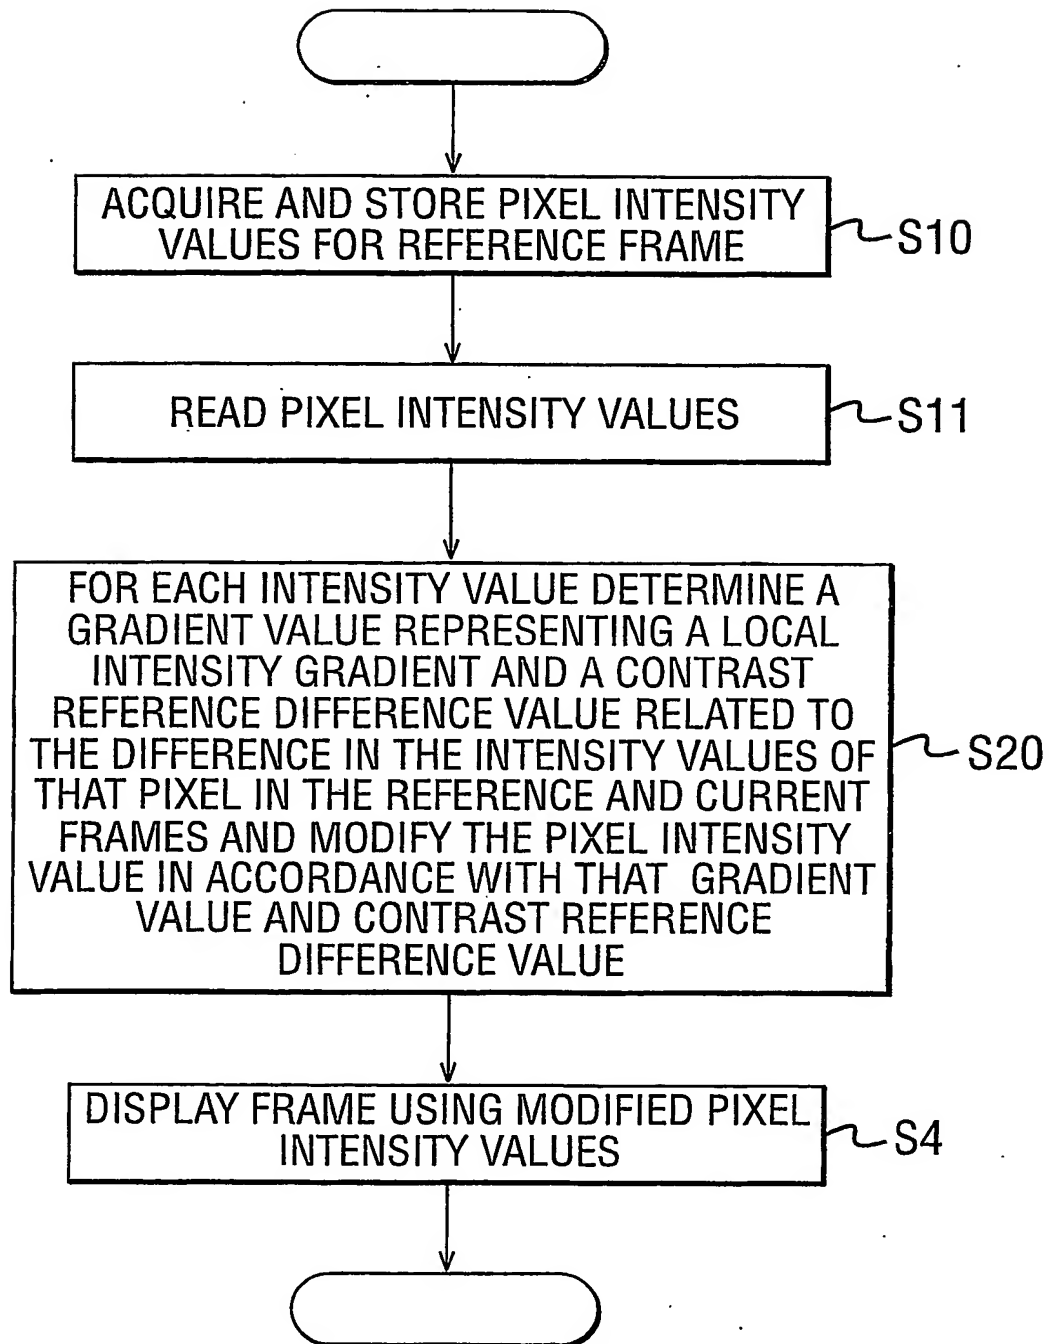

**THIS PAGE BLANK (USPTO)**

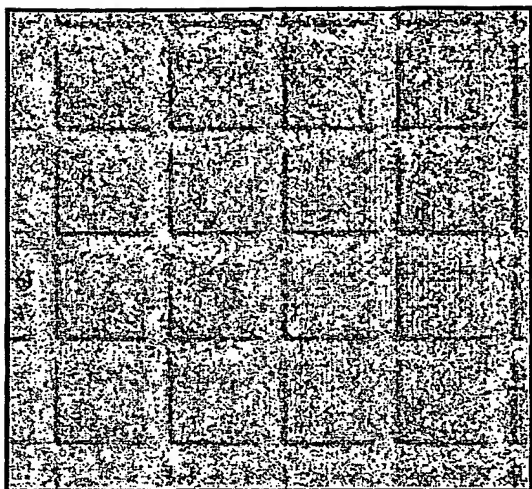


FIG. 12A

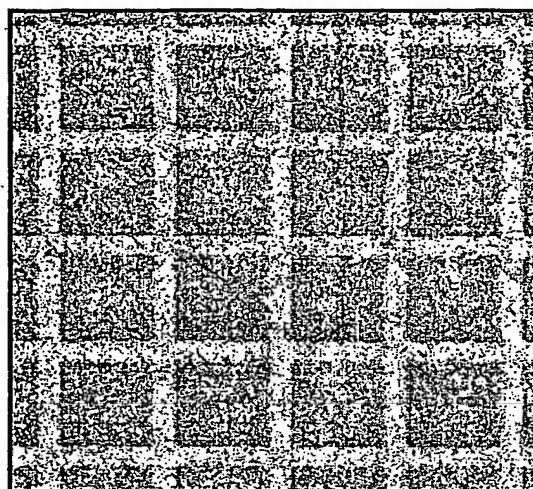


FIG. 12B

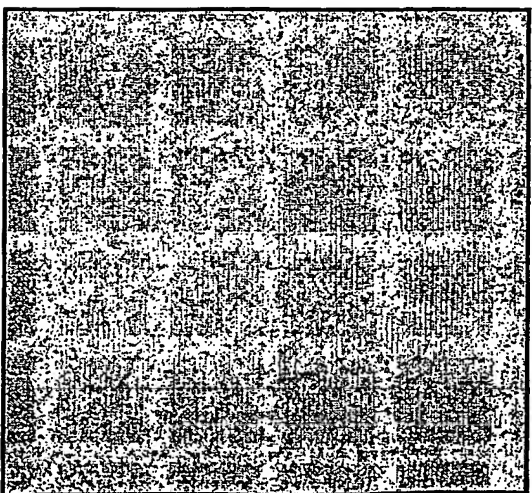


FIG. 12C

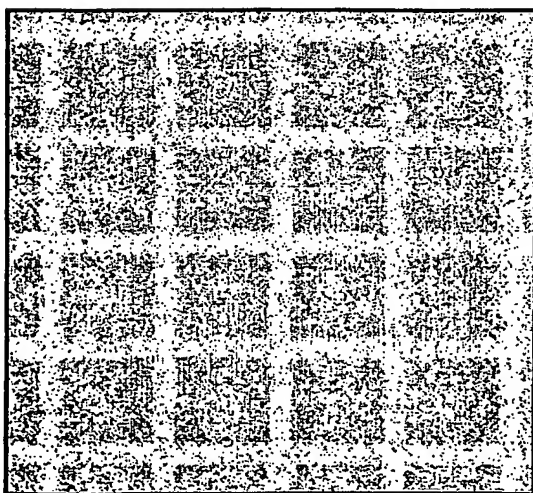


FIG. 12D

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

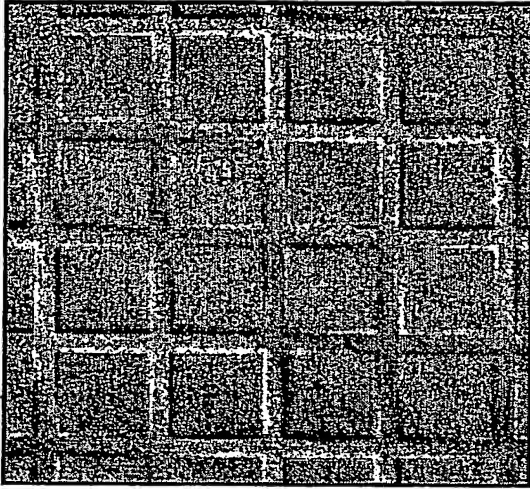


FIG. 13A

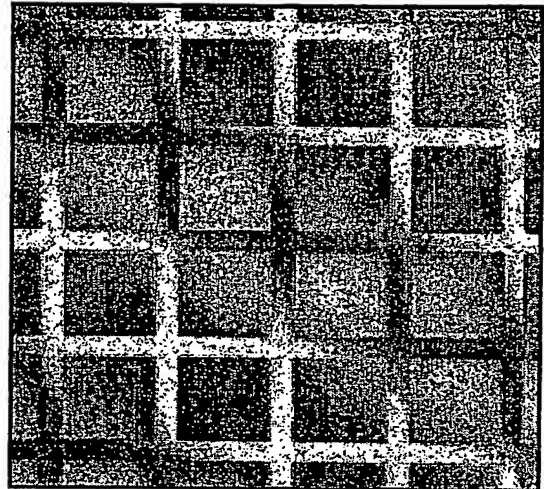


FIG. 13B

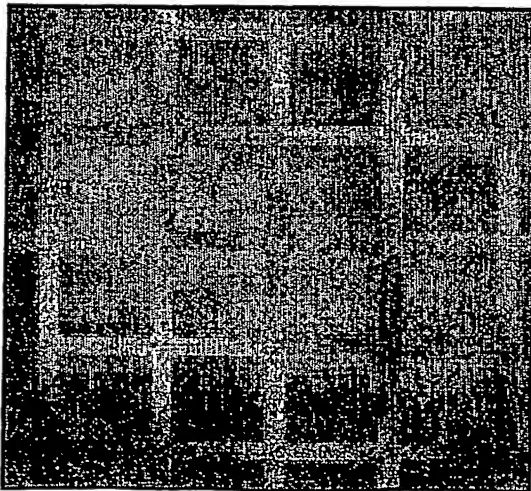


FIG. 13C


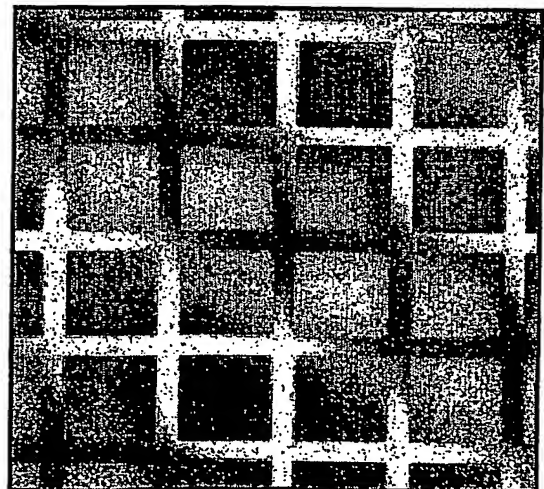


FIG. 13D

**THIS PAGE BLANK (USPTO)**

FIG. 14

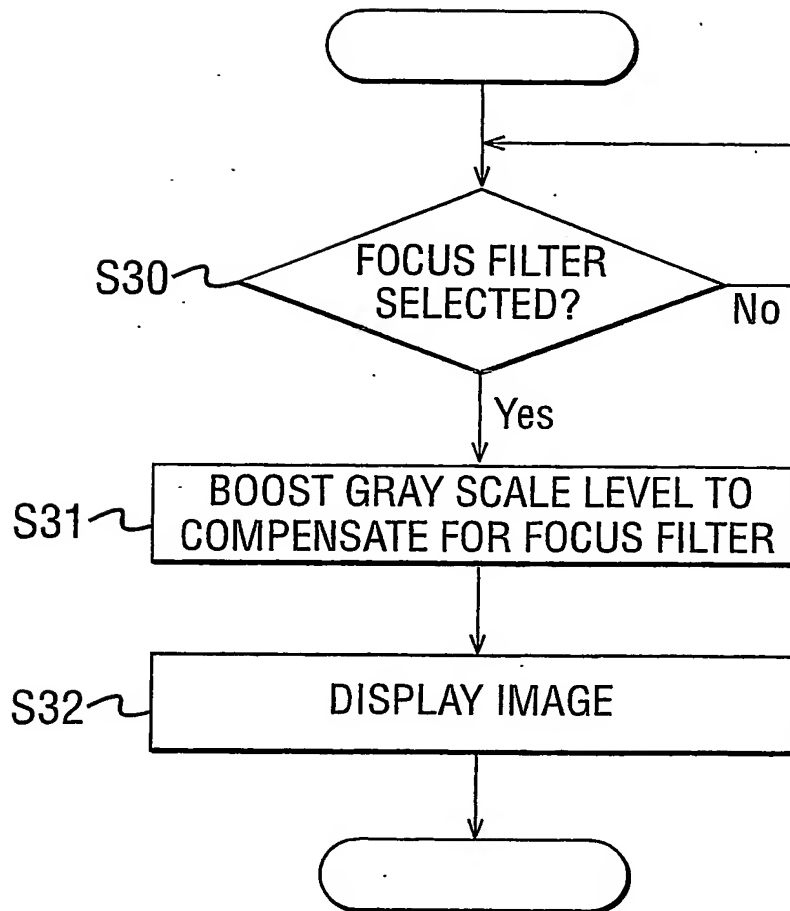

**THIS PAGE BLANK (USPTO)**



16/20  
FIG. 15



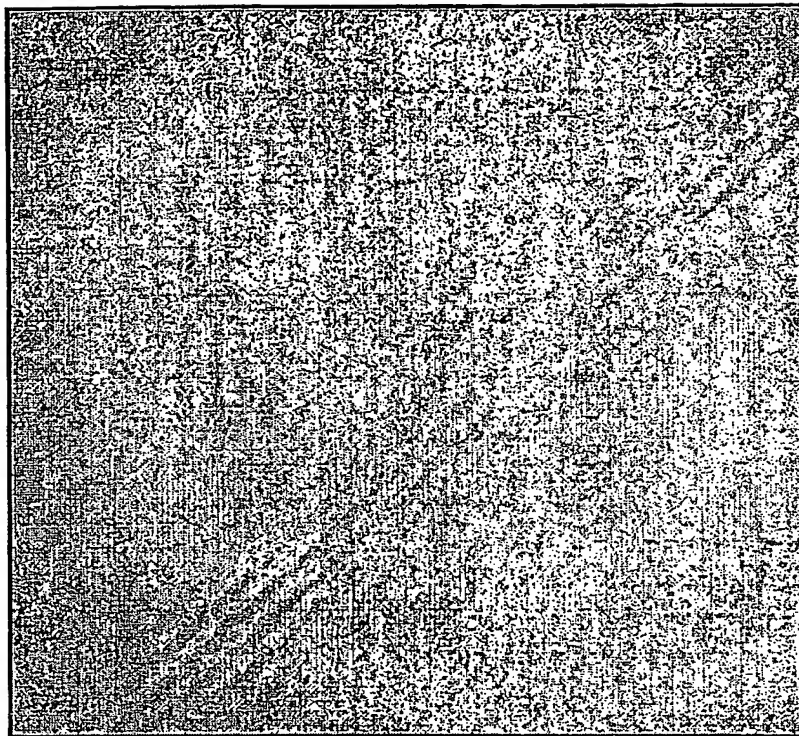


FIG. 16

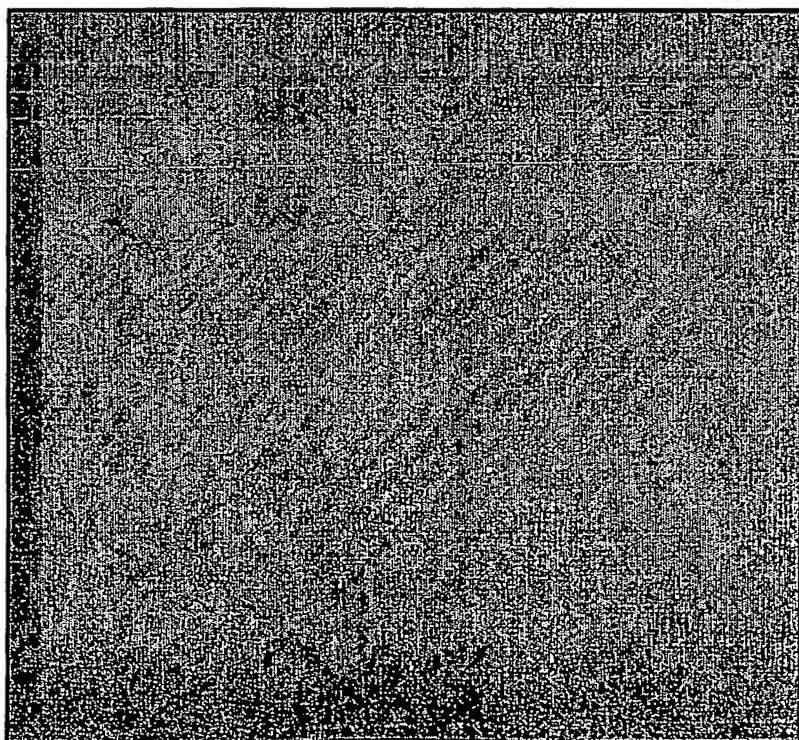


**THIS PAGE BLANK (USPTO)**

FIG. 17

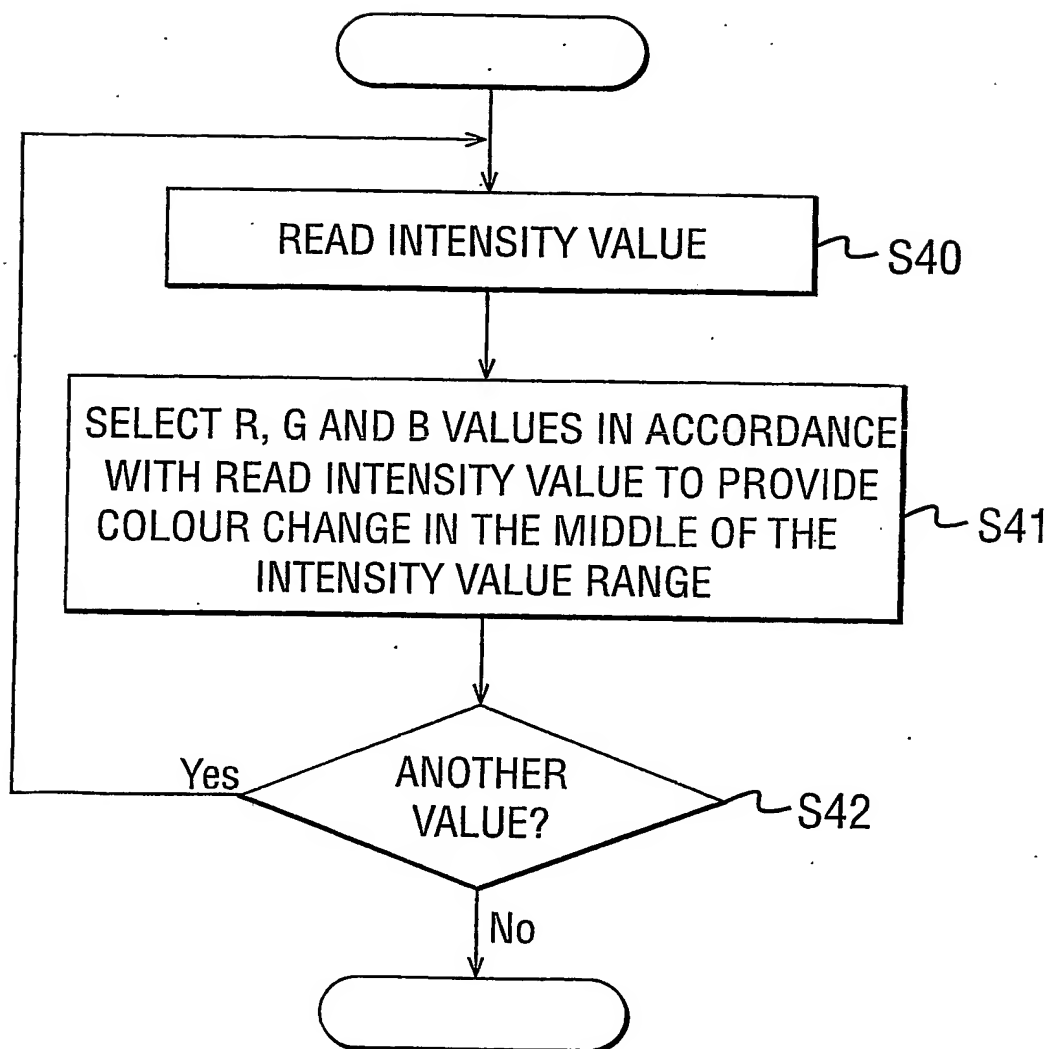


**THIS PAGE BLANK (USPTO)**

FIG. 18

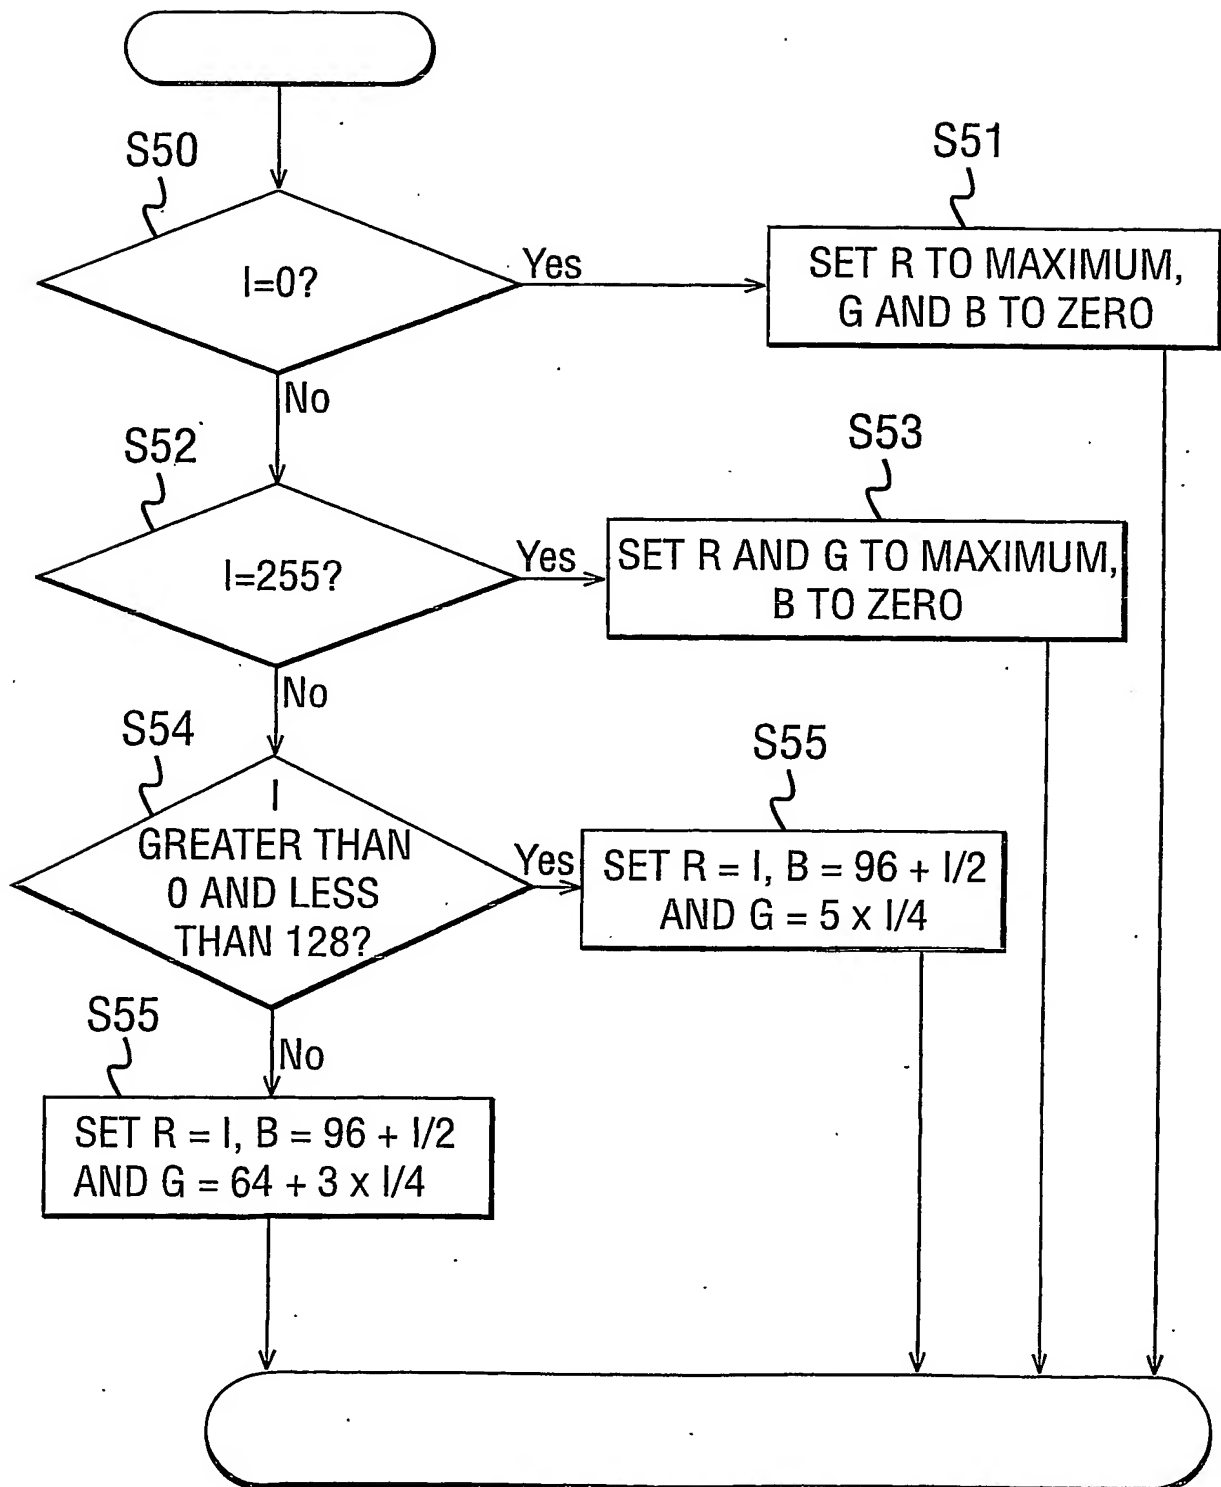

**THIS PAGE BLANK (USPTO)**

FIG. 19

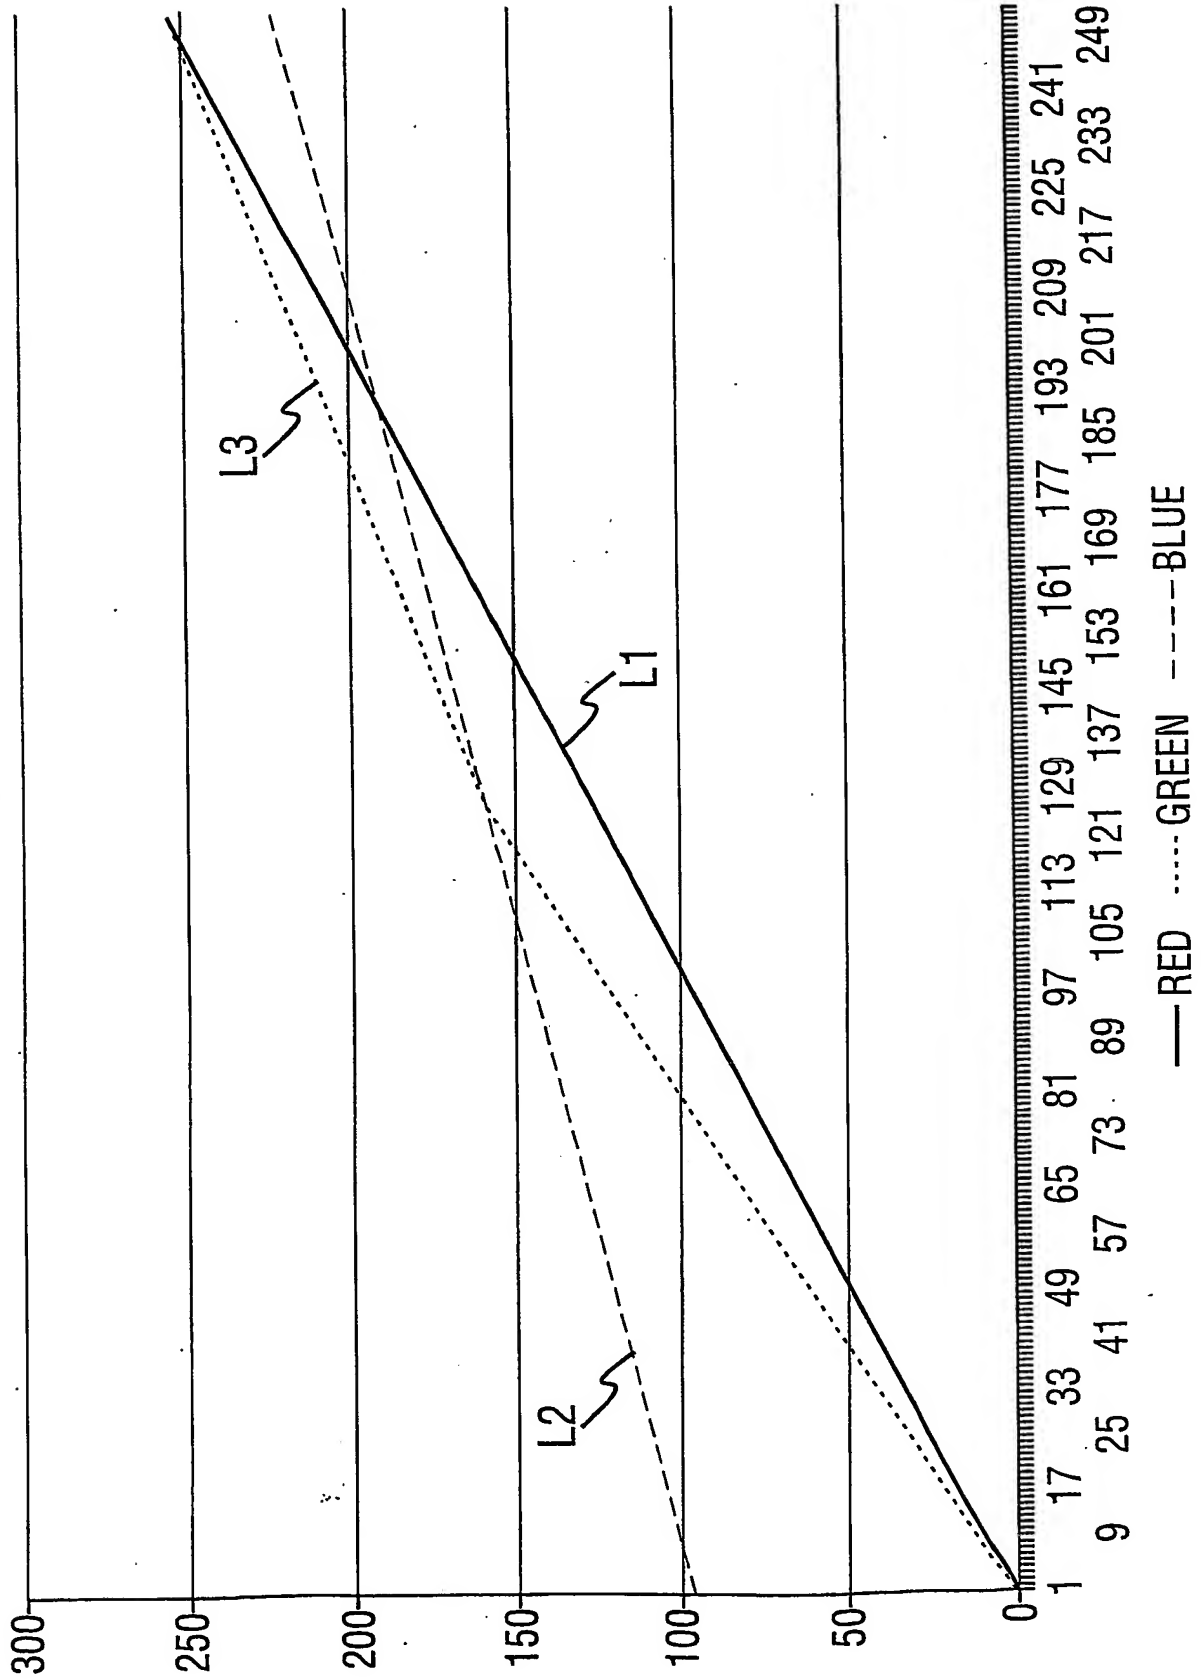

**THIS PAGE BLANK (USPTO)**



FIG. 20 <sup>20/20</sup>

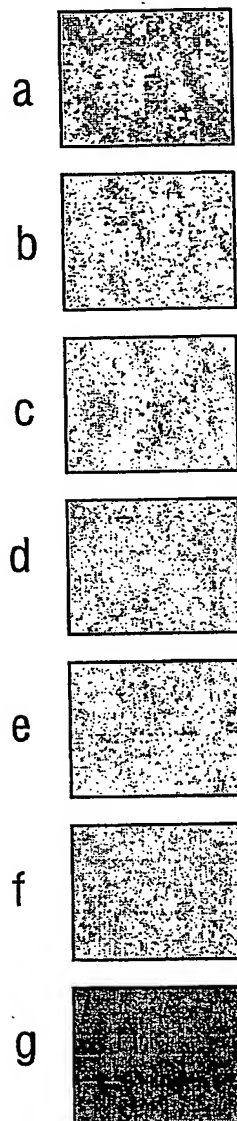


FIG. 21


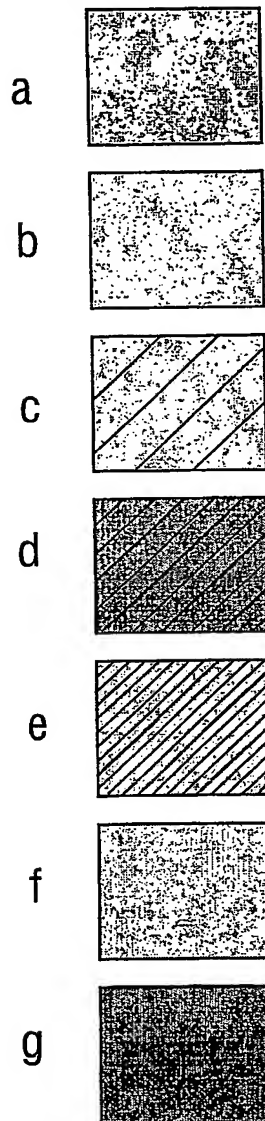


FIG. 22



PCT Application

**GB0305080**

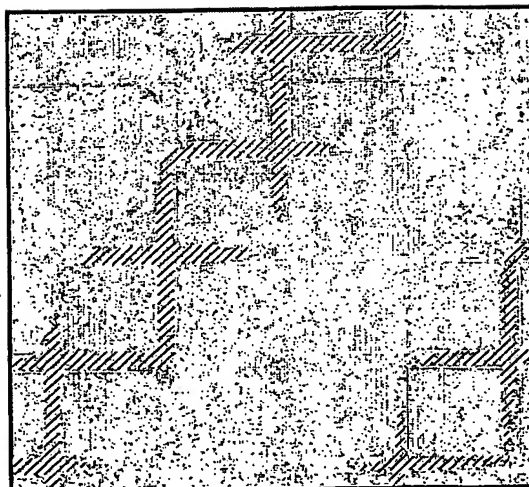

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**